

# Rointe 2025 B00K

**EFFICIENT HEATING & COOLING** 

UK & IRELAND DISTRIBUTION



















# 40 YEARS OF SUSTAINABLE COMFORT

At Rointe, we proudly celebrate 40 years at the forefront of innovation, **dedicated to advancing the most sustainable and balanced comfort.** 

RADIATORS	
EONIQ Radiator WIFI DIRECT	12
Belize Radiator (WI FI) DIRECT)	14
Olympia Radiator (WIFT DIRECT)	16
Kyros Radiator WIFI DIRECT	18
Sygma Radiator	20
Palaos WiFi Radiator WIFI DIRECT	22
Radiator accessories	24
ELECTRIC TOWEL RAILS	
Neø towel rail Wifi DIRECT	28
Orion towel rail Wifi DIRECT	30
Venezia Oval WiFi towel rail WIFI DIRECT	32
Elba Oval WiFi towel rail WIFI DIRECT	33
Elba Plus towel rail	34
Elba SWT towel rail	36
Elba Cable towel rail	37
Sublime towel rail	38
Milano towel rail with built-in fan heater	39

WET SYSTEM TOWEL RAILS	
Elba towel rail	42
Giza towel rail	44
Venezia towel rail	46
Circe towel rail	47
Torino towel rail	47
Rointe towel rail accessories	48
Valves for wet system towel rails	49
ELECTRIC UNDERFLOOR HEATING	
Milos underfloor heating	52
Erko underfloor heating	53
Accessories for underfloor heating installation	54
Genius Thermostat @ DIRECT	56
Thermostat ST.2	57
Thermostat ST.3	57
DOMESTIC HOT WATER HEATERS	
Dalis Pro hot water heat pump	60
Rome water heater will DIRECT	62
Venice water heater	63
Accessories for the installation of water heaters	64
OTHER HEATING PRODUCTS	
Onyx HHR storage heater (WIET DIRECT)	68
Giro portable heater / convector	70
Giro Short portable heater / convector	71
OUTDOOR HEATING	
Sahara infrared heater	74
Umbra Mini infrared heater	74
Lyra infrared heater	75
Lumia infrared heater	75
Fuji carbon fibre heater / lamp	76
Accessories for outdoor heaters	76
Amber vertical infrared heater	77
COOLING AND CLIMATE CONTROL	
Fiore Portable Air Conditioner	80
Drynure Dehumidifier	82




# ENERGY EFFICIENCY: SMART SAVINGS

With efficient heating & cooling solutions, you save energy and money every month. Because your home needs fewer resources to maintain a comfortable temperature all year round: warmth in winter, coolness in summer and hot water when you need it.

But how can this be achieved? By opting for Rointe low consumption comfort systems with intelligent control technologies.

In this catalogue we present efficient heating and cooling solutions that improve the energy efficiency of your home, while providing you with the comfort you need.

Gain comfort. Gain savings. With Rointe, your wellbeing always wins.

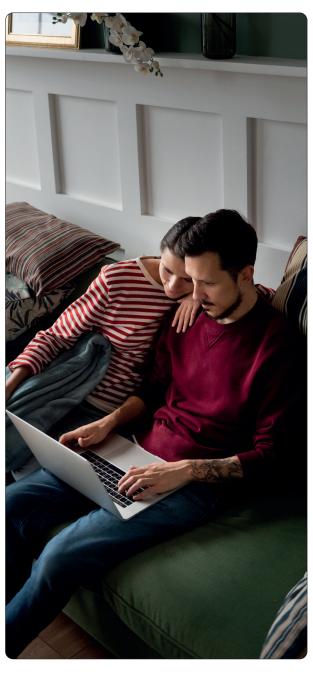

# YOUR COMFORT 25% FASTER 35% MORE STABLE 10% MORE EFFICIENT



With Inverter Smart Adaptive Tech, achieving maximum efficiency means enjoying constant comfort that is tailored to you.

For the first time ever, we have succeeded in developing an smart electric heating system that uses a single heating element capable of operating at several power ratings, effectively reducing power peaks during the temperature stabilisation period.

INVERTER SMART ADAPTIVE TECH REDUCES THE STABILISATION POWER RATING BY UP TO 80%, COMPARED TO TRADITIONAL SYSTEMS BASED ON PID CONTROLLERS.

# OTHER SYSTEMS WITH PID CONTROLLERS HOW DO THEY WORK? PID-based systems operate at 100% of their product power continuously until the setpoint temperature is reached. Once this is reached, they perform micro-cuts in consumption over this rated power. These micro-cuts determine the average power, which remains consistently between 38% and 40% of the rated power. ROOM TEMPERATURE PID-BASED SYSTEMS 21°C 1200W 1080W 960W 840W **720W** 600W 480W ОН 12H


# INVERTER SMART ADAPTIVE TECH

# **BENEFITS**



# **FASTER HEATING SPEED**

The product uses 100% of its power to quickly reach the desired temperature and then reduces its consumption to maintain it efficiently.



# MORE STABLE CONSUMPTION

Its lower stabilisation power, combined with a random coefficient that **distributes the consumption of the products out of sync**, avoids power peaks.



# **LOWER STABILISATION POWER**

When the desired temperature is reached, the product employs algorithms that **gradually reduce the power to optimise** energy and keep the room comfortable.




# **MANAGED WITH AI**

Our Artificial Intelligence systems allow the products to **manage energy intelligently**, ensuring stable heat and optimised consumption.

# HOW DOES IT WORK?

This patented technology allows our radiators to gradually adjust their power by up to 80% in an intelligent way, to adapt their consumption to the comfort needs of the room, keeping the room temperature more stable.

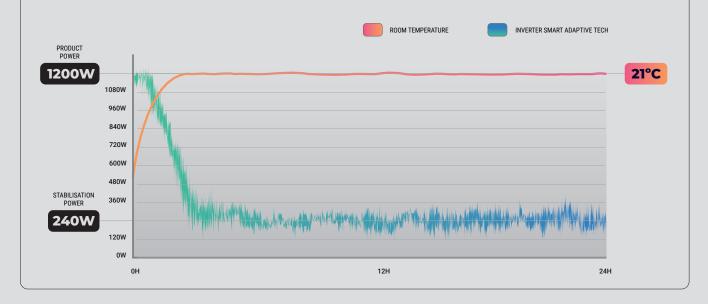

# CONTROL 60%' OF YOUR HOME'S ENERGY FROM A SINGLE APP



Discover the Rointe Global Electric Heating Solution with WiFi control through Rointe NEXA, the app that transforms your heating into a 100% intelligent ecosystem. Control your radiators, towel rails, underfloor heating and hot water with Rointe products, inside and outside the home, from the comfort of your smartphone.

Rointe Nexa

### **BENEFITS**



# **CONTROL YOUR ENERGY CONSUMPTION**

Set a maximum monthly spending limit from the application and, thanks to its smart alerts system, you will be notified in advance when you're close to reaching it.




# **GPS ON/OFF**

Enable GPS automation in your app so your devices automatically turn off when you leave home and turn on when you return, giving you convenience and energy efficiency.



# AI APPLIED TO YOUR HEATING

Discover how artificial intelligence transforms your home experience. Know the thermal state of your home and receive advice on how to optimise your energy consumption more efficiently.

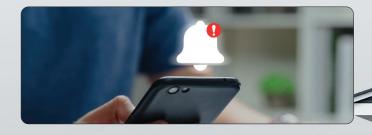

# STAY INFORMED AT ALL TIMES

Lost your internet connection? Has someone unplugged a device? Rointe Nexa alerts you in real time and helps you to resolve any incident, so that you never lose control.



# KNOW IN DETAIL HOW YOU USE YOUR ENERGY

Rointe Nexa allows you to know the energy use in your heating, with **data on consumption by product**. It also shows how much you have saved, making it easier to manage your well-being more efficiently.

1 Source: Institute for Energy Diversification and Saving (IDAE).



# **NEW NIGHT AND HOLIDAY MODES**

Save up to 8% while you sleep with Night Mode, or activate Holiday mode and come home to the perfect temperature and hot water ready and waiting. Enjoy efficient comfort with Rointe NEXA.




# GENTLE AND SAFE HEAT THAT PROTECTS EVEN THE MOST SENSITIVE OF PEOPLE

Heating products with surfaces above 75°C (radiant panels or water radiators) can quickly cause burns and are dangerous for children, the elderly, sensitive people and pets. These high temperatures make them unsuitable for installation in nurseries, schools or residential homes, for example.

Rointe LST radiators incorporate an innovative sensor that measures the surface temperature of the product and allows you to customise its operation from the App, to effectively reduce the surface temperature of the product.



Setting your personalised limit is as easy as accessing the application and setting the desired maximum contact temperature with the 'Surface Temperature Limit' function.

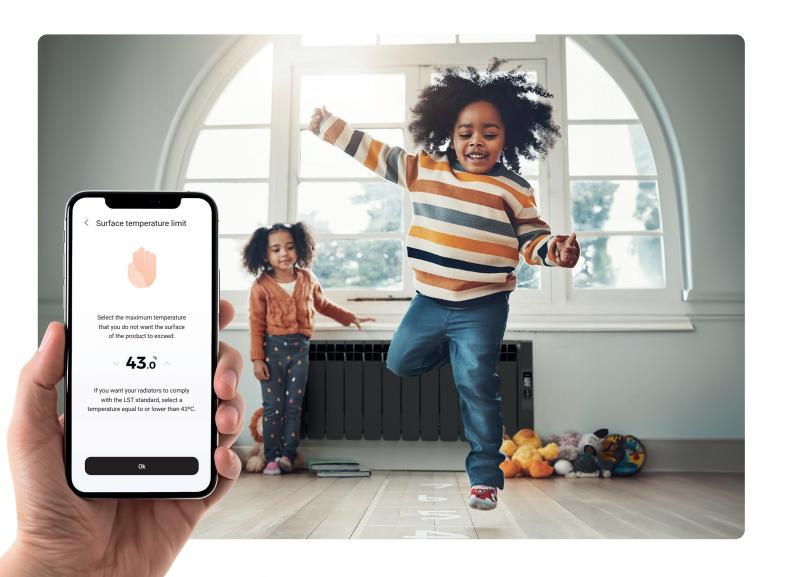

# GENIUS THERMOSTAT: CENTRALISED CONTROL OF YOUR SYSTEM







**ELECTRIC** 

# **RADIATORS**

We've developed radiators capable of offering you a soft and enveloping warmth, day or night, in all the rooms of your home.

With Rointe, comfort enters your life to fill it with pure wellbeing.

EONIQ Radiator WIFI DIRECT	12
Belize Radiator (WIFI DIRECT)	14
Olympia Radiator (WIFT DIRECT)	16
Kyros Radiator (WIFT DIRECT)	18
Sygma Radiator	20
Palaos WiFi Radiator (WIFI DIRECT)	22
Radiator accessories	24



# EONIO

# INVERTER SMART ADAPTIVE ENERGY-EFFICIENT RADIATOR WITH WIFI & AI

Displayed model
ERIP1200RAD2 - EONIQ 1200W Pearl Beige RAL 1035











# **RATED POWER SETTING**

Configure the power of the radiators from the App, adapting them to your contracted electrical power.



# LOW TEMPERATURE FUNCTION

The LST function limits the contact temperature with the radiator aluminium surface.



### **MAXIMUM ENERGY SAVINGS**

The radiator uses only 35 % of its average rated output to maintain thermal comfort.  $^{\rm 3}$ 





# CONTROL AND TECHNOLOGY







Touch panel with



Anti-frost mode

Bluetooth pairing

Inverter Smart

Adaptive Tech



Thermal Fluid



High sensitivity



Compatible with









Artificial Intelligence



Open Windows function



Early Start function



TRP consumption meter 2



GPS



automation

# FUNCTIONALITY



Power limitation



Programmable from App



4 pre-installed programmes



Lock from product & App



Limited mode for guests



Surface temp.









DESIGN AND FINISHES











White **RAL 9016** 



Textured Black **RAL 9005** 



Textured Oyster White



Textured Pearl Beige **RAL 1035** 




**RAL 7010** 

# body

TECHNICAL SPECIFICATIONS

White	ERIW0600RAD2	ERIW1200RAD2	ERIW1800RAD2
Black	ERIB0600RAD2	ERIB1200RAD2	ERIB1800RAD2
Oyster White	ERIO0600RAD2	ERIO1200RAD2	ERIO1800RAD2
Pearl Beige	ERIP0600RAD2	ERIP1200RAD2	ERIP1800RAD2
Dark Grey	ERIG0600RAD2	ERIG1200RAD2	ERIG1800RAD2
wer (W)	600	1200	1800
ower (W) <sup>3</sup>	210	420	630
elements	4	4 8	
	10.9	17.0	25.1
ded area (m²)	From 3 to 8 m <sup>2</sup>	From 6 to 16 m <sup>2</sup>	From 14 to 25 m <sup>2</sup>
	White RAL 9016 / Textured black	RAL 9005 / Textured RAL 1013 / Textu	red RAL 1035 / Textured RAL 7010
White	8435556162858	8435556162865	8435556162872
Black	8435556162889	8435556162896	8435556162902
Oyster White	8435556162919	8435556162926	8435556162933
Pearl Beige	8435556162940	8435556162957	8435556162964
Dark Grey	8435556162971	8435556162988	8435556162995
	Black Oyster White Pearl Beige Dark Grey wer (W) ower (W)³ elements  ded area (m²)  White Black Oyster White Pearl Beige	Black         ERIB0600RAD2           Oyster White         ERI00600RAD2           Pearl Beige         ERIP0600RAD2           wer (W)         600           ower (W)³         210           elements         4           10.9         From 3 to 8 m²           White RAL 9016 / Textured black           White         8435556162858           Black         8435556162889           Oyster White         8435556162919           Pearl Beige         8435556162940	Black         ERIB0600RAD2         ERIB1200RAD2           Oyster White         ERIO0600RAD2         ERIO1200RAD2           Pearl Beige         ERIP0600RAD2         ERIG1200RAD2           wer (W)         600         1200           ower (W)³         210         420           elements         4         8           10.9         17.0           ded area (m²)         From 3 to 8 m²         From 6 to 16 m²           White RAL 9016 / Textured black RAL 9005 / Textured RAL 1013 / Textured White         8435556162858         8435556162865           Black         8435556162889         8435556162896           Oyster White         8435556162919         8435556162926           Pearl Beige         8435556162940         8435556162957

# SCHEME Dimensions in mm.









PRODUCT VIDEO	
AUGMENTED REALITY	
DOWNLOAD APP ROINTE NEXA	

<sup>1)</sup> Compatible with 2.4 GHz Wi-Fi networks. 2) The figure may vary depending on the circumstances of the electrical installation. 3) Tests carried out in

The product includes 1.7 m cable with plug (outlet right side), brackets, installation kit + template and user manual.



# BELIZE

WI FI DIRECT

INVERTER SMART ADAPTIVE ENERGY-EFFICIENT RADIATOR WITH WIFI & AI

Displayed model
BRIW1200RAD3 - Belize 1200W white RAL 9016











# **RATED POWER SETTING**

Configure the power of the radiators from the App, adapting them to your contracted electrical power.



# LOW TEMPERATURE FUNCTION


The LST function limits the contact temperature with the radiator aluminium surface.



# MAXIMUM ENERGY SAVINGS

The radiator uses only 35 % of its average rated output to maintain thermal comfort.  $^{\rm 3}$ 









# CONTROL AND TECHNOLOGY







Touch panel with TFT display



Anti-frost mode

Bluetooth

pairing

Inverter Smart

Adaptive Tech



Thermal Fluid



High sensitivity



Compatible with









Artificial Intelligence





Early Start function



TRP consumption meter 2



GPS automation

### FUNCTIONALITY



limitation

Power



Programmable product & App



4 pre-installed programmes



Lock from product & App



Limited mode for guests



**RAL 9005** 

Surface temp.



Night saving







**DESIGN AND FINISHES** 







100% aluminium









# **TECHNICAL SPECIFICATIONS**


						— SHORT VERSION –	
MODELS —	White	BRIW0600RAD3	BRIW1200RAD3	BRIW1800RAD3	BRIW1000RADC4	BRIW1250RADC4	BRIW1500RADC4
MODELS	Black	BRIB0600RAD3	BRIB1200RAD3	BRIB1800RAD3	BRIB1000RADC4	BRIB1250RADC4	BRIB1500RADC4
Nominal Power (\	W)	600	1200	1800	1000	1250	1500
Effective Power (	W) <sup>3</sup>	210	420	630	350	437	525
Number of eleme	ents	4	8	12	8	10	12
Weight (Kg)		8.8	14.3	21.8	8.9	12.7	16.4
Recommended a	rea (m²)	From 3 to 8 m <sup>2</sup>	From 6 to 16 m <sup>2</sup>	From 14 to 25 m <sup>2</sup>	From 5 to 14 m <sup>2</sup>	From 6 to 17 m <sup>2</sup>	From 7 to 21 m <sup>2</sup>
Finishes White RAL 9016 / Matt Black RAL 900		RAL 9005	White RAL	9016 / Matt Black	RAL 9005		
FAN12	White	8435556165347	8435556166351	8435556166368	8435556166603	8435556166610	8435556166627
EAN13 —	Black	8435556166375	8435556166382	8435556166399	8435556166634	8435556166641	8435556166658

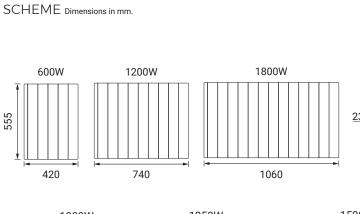













113

100 100



1) Compatible with 2.4 GHz Wi-Fi networks. 2) The figure may vary depending on the circumstances of the electrical installation. 3) Tests carried out in independent laboratories.

The product includes 1.7 m cable with plug (outlet right side), brackets, installation kit + template and user manual.



# **OLYMPIA** WIFF DIRECT

INVERTER SMART ADAPTIVE ENERGY-EFFICIENT RADIATOR WITH WIFI & AI

**Displayed model**ORIW1200RAD3 - Olympia 1200W white RAL 9016











# **RATED POWER SETTING**

Configure the power of the radiators from the App, adapting them to your contracted electrical power.




# LOW TEMPERATURE FUNCTION

The LST function limits the contact temperature with the radiator aluminium surface.



# **MAXIMUM ENERGY SAVINGS**

The radiator uses only 35 % of its average rated output to maintain thermal comfort.  $^{\rm 3}$ 

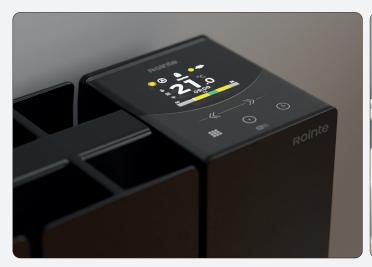



# CONTROL AND TECHNOLOGY







Touch panel with TFT display



Anti-frost mode





Adaptive Tech



Natural Stone



High sensitivity



Compatible with









Artificial Intelligence



Open Windows function

Early Start function



TRP consumption meter 2





GPS automation

### FUNCTIONALITY



limitation



Programmable product & App



4 pre-installed programmes



Lock from product & App



Limited mode for guests

**RAL 9005** 



Surface temp.







### DESIGN AND FINISHES





100% aluminium











**TECHNICAL SPECIFICATIONS** 

MODELC	White	ORIW0600RAD3	ORIW1200RAD3	ORIW1800RAD3
MODELS -	Black	ORIB0600RAD3	ORIB1200RAD3	ORIB1800RAD3
Nominal Power (W)		600	1200	1800
Effective Power (W) <sup>3</sup>		210	420	630
Number of elements		4 8		12
Weight (Kg)		13.8	26.3	40.3
Recommended area (m²) From 3 to 8 m²		From 3 to 8 m <sup>2</sup>	From 6 to 16 m <sup>2</sup>	From 14 to 25 m <sup>2</sup>
Finishes			White RAL 9016 / Matt Black RAL 9005	
EAN10	White	8435556166856	8435556166863	8435556166870
EAN13 —	Black	8435556166887	8435556166894	8435556166900

# SCHEME Dimensions in mm.







PRODUCT

**VIDEO** 

The product includes 1.7 m cable with plug (outlet right side), brackets, installation kit + template and user manual.

<sup>1)</sup> Compatible with 2.4 GHz Wi-Fi networks. 2) The figure may vary depending on the circumstances of the electrical installation. 3) Tests carried out in



# KYROS WED DIRECT

INVERTER SMART ADAPTIVE ENERGY-EFFICIENT RADIATOR WITH WIFI & AI

Displayed model KRIW1200RAD4 - Kyros 1200W white RAL 9016











# **RATED POWER SETTING**

Configure the power of the radiators from the App, adapting them to your contracted electrical power.



# LOW TEMPERATURE FUNCTION


The LST function limits the contact temperature with the radiator aluminium surface.




### **MAXIMUM ENERGY SAVINGS**

The radiator uses only 35 % of its average rated output to maintain thermal comfort.<sup>3</sup>









# CONTROL AND TECHNOLOGY



Module WiFi Inside 1



Touch panel with TFT display



Anti-frost mode

(0(\*)0) Bluetooth pairing

Inverter Smart

Adaptive Tech

Thermal Fluid



High sensitivity



Compatible with









Intelligence



Early Start function



TRP consumption meter 2



automation

GPS

FUNCTIONALITY



Power

limitation

Programmable



product & App



4 pre-installed programmes



Lock from product & App



Limited mode for guests



**RAL 9005** 

Surface temp. limitation



Night saving



Holiday



**DESIGN AND FINISHES** 



body

420 MM Short model





100% aluminium body



PC/ABS











**TECHNICAL SPECIFICATIONS** 


					— SHORT VERSION -	
Whi	e KRIW0600RAD4	KRIW1200RAD4	KRIW1800RAD4	KRIW1000RADC4	KRIW1250RADC4	KRIW1500RADC4
MODELS Blace	k KRIB0600RAD4	KRIB1200RAD4	KRIB1800RAD4	KRIB1000RADC4	KRIB1250RADC4	KRIB1500RADC4
Nominal Power (W)	600	1200	1800	1000	1250	1500
Effective Power (W) <sup>3</sup>	210	420	630	350	437	525
Number of elements	4	8	12	8	10	12
Weight (Kg)	8.8	16.3	23.8	10.0	13.4	17.0
Recommended area (m²	From 3 to 8 m <sup>2</sup>	From 6 to 16 m <sup>2</sup>	From 14 to 25 m <sup>2</sup>	From 5 to 14 m <sup>2</sup>	From 6 to 17 m <sup>2</sup>	From 7 to 21 m <sup>2</sup>
Finishes White RAL 9016 / Matt Black RAL 9005		RAL 9005	White RAI	9016 / Matt Black	RAL 9005	
Whi	e 8435556162452	8435556162469	8435556162476	8435556162643	8435556162650	8435556162667
EAN13 Blace	k 8435556162483	8435556162490	8435556162506	8435556162674	8435556162681	8435556162698



























1) Compatible with 2.4 GHz Wi-Fi networks. 2) The figure may vary depending on the circumstances of the electrical installation. 3) Tests carried out in independent laboratories.

The product includes 1.7 m cable with plug (outlet right side), brackets, installation kit + template and user manual.



# **SYGMA**

ENERGY-EFFICIENT DIGITAL RADIATOR PROGRAMABLE 24/7

**Displayed model** SRI1200RAD2 - Sygma 1200W white RAL 9016







**PLUG & PLAY INSTALLATION** 

Simple connection that allows you to enjoy cosy and comfortable warmth almost immediately.



**REMOTE CONTROL** 

Infrared remote control available. More detailed information on page 24.



**MAXIMUM ENERGY SAVINGS** 

The radiator only uses an average of 38% of its rated power to maintain comfort.1



Displayed model SRI1250RADC3 - Sygma Short 1250W white RAL 9016



# CONTROL AND TECHNOLOGY









Optional remote control Comfort, Eco and Anti-frost mode









High sensitivity









Func. Open Windows



Early Start function

### FUNCTIONALITY





Programmable product & remote

Lock from product & remote

### DESIGN AND FINISHES







100% aluminium







# **TECHNICAL SPECIFICATIONS**


<ul> <li>SHORT VERSION</li> </ul>
-----------------------------------


MODELS	SRI0600RAD3	SRI1200RAD3	SRI1800RAD3	SRI1000RADC3	SRI1250RADC3	SRI1500RADC3
Nominal Power (W)	600	1200	1800	1000	1250	1500
Effective Power (W) <sup>1</sup>	210	420	630	350	437	525
Number of elements	4	8	12	8	10	12
Weight (Kg)	8.8	14.3	23.8	10.0	13.4	17.3
Recommended area (m²)	From 3 to 8 m <sup>2</sup>	From 6 to 16 m <sup>2</sup>	From 14 to 25 m <sup>2</sup>	From 5 to 14 m <sup>2</sup>	From 6 to 17 m <sup>2</sup>	From 7 to 21 m <sup>2</sup>
Finishes		White RAL 9016			White RAL 9016	
EAN13	8435556163237	8435556163244	8435556163251	8435556163299	8435556163305	8435556163312

# SCHEME Dimensions in mm.






















ecodesign RoHS (E









1) Tests carried out in independent laboratories.

The product includes 1.7 m cable with plug (outlet right side), brackets, installation kit + template and user manual.




# PALAOS WIF DIRECT

ENERGY-EFFICIENT DIGITAL RADIATOR WITH WIFI & AI

Displayed model

EVIP1500RAD2 - Palaos WiFi 1500W Textured Pearl Beige RAL 1035











### **SMARTPHONE CONTROL**

Control your Palaos radiator whenever and wherever you want from the new Rointe NEXA app.



**DESIGN WITH HIDDEN PANEL** 

The panel is concealed on the side, allowing a clean and uniform front view.



# **MAXIMUM ENERGY SAVINGS**

Its technology allows the product to offer maximum performance with minimum consumption.





# CONTROL AND TECHNOLOGY





Module



Comfort, Eco and Touch panel with LED indicator



Bluetooth pairing



Liquid Stone Tech



Optimizer Energy Plus



High sensitivity thermostat



Compatible with

# EFFICIENCY







function





GPS automation

# FUNCTIONALITY



Programmable from App



4 pre-installed



Lock from product & App



Limited mode for guests



Surface temp.



Holiday



Countdown

### DESIGN AND FINISHES





100% aluminium



Textured White **RAL 9016** 




Anthracite SANDBLAST **RAL 1035** 




# TECHNICAL SPECIFICATIONS

	White	PIW1000WF	PIW1500WF	PIW2000WF
MODELS	Black PIB1000WF		PIB1500WF	PIB2000WF
	Pearl Beige	PIP1000WF	PIP1500WF	PIP2000WF
Nominal Power (W)		1000	1500	2000
Number of elements 2		2	3	4
Weight (Kg)	Veight (Kg) 11.0		15.5	20.5
Recommended area (m²) From 5 to 14 m²		From 5 to 14 m <sup>2</sup>	From 7 to 17 m <sup>2</sup>	From 16 to 28 m <sup>2</sup>
Finishes	inishes White RAL 9016 textured / Anthracite Sandblast / RAL 1035 textured			
	White	8435556167037	8435556167044	8435556167051
EAN13	Black	8435556167068	8435556167075	8435556167082
	Pearl Beige	8435556167099	8435556167105	8435556167112

# SCHEME Dimensions in mm

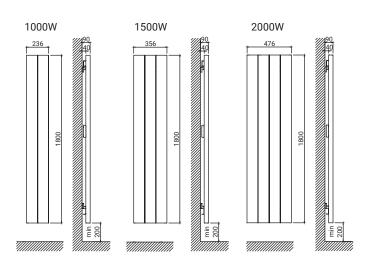





1) Compatible with 2.4 GHz Wi-Fi networks. 2) The figure may vary depending on the circumstances of the electrical installation.

The product includes 1.7 m cable without plug (outlet right side), brackets, installation kit + template and user manual.

# **ACCESSORIES**

# FOR **ROINTE** ELECTRIC RADIATORS

# AIR CONTROL REMOTE CONTROL

# CONTROL

- Soft touch buttons and TFT display.
- · Send up to 3 metres.
- · Reception up to 1 metre.

# **FUNCTIONALITY**


- 24/7 Programmer.
- Manual / Automatic function.
- · Control of the illumination of the product display.
- · Clear memory.
- Remote locking of the product.
- Display of the effective power of the product.

# DESIGN

- Body made of PC/ABS.
- Power supply: 2 AAA batteries (included).
- · Wall support included.



MODEL	ACMI120
Width x height x depth (mm)	54 x 177 x 21
Depth with bracket (mm)	25
Weight (g)	130
Finish	White
EAN13	8436045914286

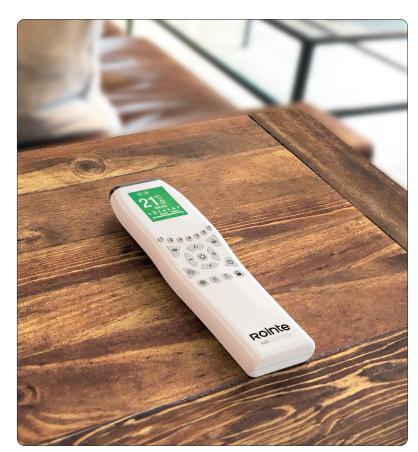

Displayed model ACMN120 - AIR Control control





# WHEEL KIT

Complete set of wheels to transform the product into a portable radiator. Includes 2 metal plates, 4 castors, fixing system and assembly diagram.

Not compatible with PALAOS radiators.

# **IMPORTANT**

Rointe radiators are designed to be hung on the wall and their correct sizing is essential to achieve maximum efficiency.

Rointe is not responsible for a possible reduction in the efficiency of the product due to the installation of wheels to enable its mobility.

MODELS -	White	RIRW02
WIODELS	Black	RIRB02
Units per pack		2
Compatible with		Eoniq, Belize, Olympia, Kyros and Sygma
Finishes		White RAL 9010 / Matt Black RAL 9005
EAN12	White	8435556162278
EAN13 —	Black	8435556162285



**Displayed model**RKYB0600 - Protective grille matt black RAL 9005



**Displayed model** RKYW0600 - Protective grille white RAL 9016

# **PROTECTIVE GRILLS**

Vandal-resistant protective grill designed to prevent tampering with the product. Not compatible with PALAOS radiators.

	I	STANDARD VERSION			SHORT VERSION		
MODELS	White	RKYW0600	RKYW1200	RKYW1800	RKYW1000C	RKYW1250C	RKYW1500C
MODELS	Black	RKYB0600	RKYB1200	RKYB1800	RKYB1000C	RKYB1250C	RKYB1500C
Width x height (mm)		600 x 660	840 x 660	1160 x 660	840 x 500	1000 x 500	1160 x 500
Depth (mm)		150	150	150	150	150	150
Compatible with (no. of ite	ms)	4	8	12	8	10	12
Finishes		White RAL 9016 / Matt Black RAL 9005		RAL 9005	White RAL 9016 / Matt Black RAL 9005		k RAL 9005
EAN12	White	8435556168119	8435556168126	8435556168133	8435556168157	8435556168164	8435556168171
EAN13	Black	8435556168188	8435556168195	8435556168201	8435556168225	8435556168232	8435556168249





# **TOWEL RAILS**

Envelop your bathroom in comfortable warmth, while enjoying soft, dry towels. With Rointe towel rails, you can turn your bathroom into a space of pure wellbeing, where you can relax after an intense day's work.

Neø towel rail (WIFI DIRECT)	28
Orion towel rail (WIFI DIRECT)	30
Venezia Oval WiFi towel rail WIFI DIRECT	32
Elba Oval WiFi towel rail WIFI DIRECT	33
Elba Plus towel rail	34
Elba SWT towel rail	36
Elba Cable towel rail	37
Sublime towel rail	38
Milano towel rail with built-in fan heater	39



# NEØ WIE DIRECT

# ENERGY-EFFICIENT DIGITAL TOWEL RAIL WITH WIFI & AI

Displayed model

NTI045SEB - NEØ 500W textured black RAL 9005











### **SMARTPHONE CONTROL**

Control your towel rail whenever and wherever you want with the new Rointe NEXA app.



# **INNOVATIVE DESIGN**

The product has an integrated control panel which gives it a clean and uniform appearance.



# **MAXIMUM ENERGY SAVINGS**

Its technology allows the product to offer maximum performance with minimum consumption.





# CONTROL AND TECHNOLOGY







Touch panel with



Anti-frost mode

Bluetooth

pairing

OPTIMIZER Optimizer Energy Plus



Optimum Flux



High sensitivity



Compatible with









Early Start function



TRP consumption meter



GPS automation

### FUNCTIONALITY



from App







App lock





Boost function up to 2 hours

2H





Holiday



Countdown

### DESIGN AND FINISHES



Concealed

brackets

Programmable











White RAL 9016

for guests



Textured Black RAL 9005



Chrome mirror



Oyster White Text. RAL 1013




Pearl Beige Text. RAL 1035



# **TECHNICAL SPECIFICATIONS**

Width - L (mm)         500         500         500           Recommended area (m²)         Up to 3 m²         Up to 5 m²         Up to 7.5 m²		White	NTI030SEW	NTI050SEW	NTI075SEW
MODELS         Oyster White         NTI030SEO         NTI050SEO         NTI075SEO           Pearl Beige         NTI030SEG         NTI050SEG         NTI075SEG           Dark Grey         NTI030SEG         NTI050SEG         NTI075SEG           Nominal Power (W)         White / Black / RAL         300         500         750           Number of bars         13         17         21           Width - L (mm)         500         500         500           Recommended area (m²)         Up to 3 m²         Up to 5 m²         Up to 7.5 m²           Finishes         White RAL 9016 / Black textured RAL 9005 / Chrome / RAL 1013 text. / RAL 1035 text. / RAL 7010 text.         White           Black         8435556163626         8435556163633         8435556163640           Black         8435556163688         8435556163695         8435556163671           EAN13         Oyster White         8435556163718         8435556163725         8435556163732		Black	NTI030SEB	NTI050SEB	NTI075SEB
Oyster White         NTI030SE0         NTI050SE0         NTI075SE0           Pearl Beige         NTI030SEG         NTI050SEG         NTI075SEG           Dark Grey         NTI030SEG         NTI050SEG         NTI075SEG           Nominal Power (W)         White / Black / RAL         300         500         750           Number of bars         13         17         21           Width - L (mm)         500         500         500           Recommended area (m²)         Up to 3 m²         Up to 5 m²         Up to 7.5 m²           Finishes         White RAL 9016 / Black textured RAL 9005 / Chrome / RAL 1013 text. / RAL 1035 text. / RAL 7010 text.           EAN13         Black         8435556163626         8435556163633         8435556163671           Oyster White         8435556163657         8435556163664         8435556163673         8435556163725         8435556163732	MODELC	Chrome	NTI030SEC	NTI050SEC	NTI075SEC
Dark Grey         NTI030SEG         NTI050SEG         NTI075SEG           Nominal Power (W)         White / Black / RAL         300         500         750           Number of bars         13         17         21           Width - L (mm)         500         500         500           Recommended area (m²)         Up to 3 m²         Up to 5 m²         Up to 7.5 m²           Finishes         White RAL 9016 / Black textured RAL 9005 / Chrome / RAL 1013 text. / RAL 1035 text. / RAL 7010 text.         White RAL 9016 / Black textured RAL 9005 / Chrome / RAL 1013 text. / RAL 1035 text. / RAL 7010 text.           Black         8435556163626         8435556163633         8435556163640           Black         8435556163688         8435556163695         8435556163701           Chrome         8435556163657         8435556163664         8435556163732           Oyster White         8435556163718         8435556163725         8435556163732	MODELS	Oyster White	NTI030SEO	NTI050SEO	NTI075SE0
White / Black / RAL         300         500         750           Chrome         300         300         500           Number of bars         13         17         21           Width - L (mm)         500         500         500           Recommended area (m²)         Up to 3 m²         Up to 5 m²         Up to 7.5 m²           Finishes         White RAL 9016 / Black textured RAL 9005 / Chrome / RAL 1013 text. / RAL 1035 text. / RAL 7010 text.           White         8435556163626         8435556163633         8435556163640           Black         8435556163688         8435556163695         8435556163701           EAN13         Oyster White         8435556163718         8435556163725         8435556163732		Pearl Beige	NTI030SEP	NTI050SEP	NTI075SEP
Nominal Power (W)         Chrome         300         300         500           Number of bars         13         17         21           Width - L (mm)         500         500         500           Recommended area (m²)         Up to 3 m²         Up to 5 m²         Up to 7.5 m²           Finishes         White RAL 9016 / Black textured RAL 9005 / Chrome / RAL 1013 text. / RAL 1035 text. / RAL 7010 text.           White         8435556163626         8435556163633         8435556163640           Black         8435556163688         8435556163695         8435556163701           Chrome         8435556163657         8435556163664         8435556163671           Oyster White         8435556163718         8435556163725         8435556163732		Dark Grey	NTI030SEG	NTI050SEG	NTI075SEG
Chrome         300         300         500           Number of bars         13         17         21           Width - L (mm)         500         500         500           Recommended area (m²)         Up to 3 m²         Up to 5 m²         Up to 7.5 m²           Finishes         White RAL 9016 / Black textured RAL 9005 / Chrome / RAL 1013 text. / RAL 1035 text. / RAL 7010 text.           White         8435556163626         8435556163633         8435556163640           Black         8435556163688         8435556163695         8435556163701           Chrome         8435556163657         8435556163664         8435556163712           Oyster White         8435556163718         8435556163725         8435556163732	Naminal Dawar (W)	White / Black / RAL	300	500	750
Width - L (mm)         500         500         500           Recommended area (m²)         Up to 3 m²         Up to 5 m²         Up to 7.5 m²           Finishes         White RAL 9016 / Black textured RAL 9005 / Chrome / RAL 1013 text. / RAL 1035 text. / RAL 7010 text.           White         8435556163626         8435556163633         8435556163640           Black         8435556163688         8435556163695         8435556163701           Chrome         8435556163657         8435556163664         8435556163671           Oyster White         8435556163718         8435556163725         8435556163732	Normal Power (W)	Chrome	300	300	500
Recommended area (m²)         Up to 3 m²         Up to 5 m²         Up to 7.5 m²           Finishes         White RAL 9016 / Black textured RAL 9005 / Chrome / RAL 1013 text. / RAL 1035 text. / RAL 7010 text.           White         8435556163626         8435556163633         8435556163640           Black         8435556163688         8435556163695         8435556163701           Chrome         8435556163657         8435556163664         8435556163671           Oyster White         8435556163718         8435556163725         8435556163732	Number of bars		13	17	21
Finishes         White RAL 9016 / Black textured RAL 9005 / Chrome / RAL 1013 text. / RAL 1035 text. / RAL 7010 text.           White         8435556163626         8435556163633         8435556163640           Black         8435556163688         8435556163695         8435556163701           Chrome         8435556163657         8435556163664         8435556163671           EAN13         Oyster White         8435556163718         8435556163725         8435556163732	Width - L (mm)		500	500	500
White         8435556163626         8435556163633         8435556163640           Black         8435556163688         8435556163695         8435556163701           Chrome         8435556163657         8435556163664         8435556163671           Oyster White         8435556163718         8435556163725         8435556163732	Recommended area	(m²)	Up to 3 m <sup>2</sup>	Up to 5 m <sup>2</sup>	Up to 7.5 m <sup>2</sup>
Black 8435556163688 8435556163695 8435556163701  Chrome 8435556163657 8435556163664 8435556163671  Oyster White 8435556163718 8435556163725 8435556163732	Finishes		White RAL 9016 / Black textured	I RAL 9005 / Chrome / RAL 1013 text	. / RAL 1035 text. / RAL 7010 text.
EAN13 Chrome 8435556163657 8435556163664 8435556163671 Oyster White 8435556163718 8435556163725 8435556163732		White	8435556163626	8435556163633	8435556163640
EAN13 Oyster White 8435556163718 8435556163725 8435556163732		Black	8435556163688	8435556163695	8435556163701
Oyster White 8435556163718 8435556163725 8435556163732	EAN12	Chrome	8435556163657	8435556163664	8435556163671
Pearl Beige 8435556163749 8435556163756 8435556163763	EAN13	Oyster White	8435556163718	8435556163725	8435556163732
		Pearl Beige	8435556163749	8435556163756	8435556163763
Dark Grey 8435556163770 8435556163787 8435556163794		Dark Grey	8435556163770	8435556163787	8435556163794

# SCHEME Dimensions in mm.

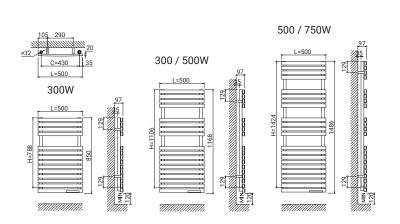







PRODUCT **VIDEO** AUGMENTED **REALITY** DOWNLOAD APP **ROINTE NEXA** 

1) Compatible with 2.4 GHz Wi-Fi networks. 2) The figure may vary depending on the circumstances of the electrical installation.

The product includes 1.4 m cable without plug (right side outlet), brackets, installation kit + template and user manual.



# ORION WIFE DIRECT

ENERGY-EFFICIENT DIGITAL TOWEL RAIL WITH WIFI & AI

Displayed model OTI030SEB4 - Orion 300W white











# **SMARTPHONE CONTROL**

Control your towel rail whenever and wherever you want with the new Rointe NEXA app.



# **ELEGANCE AND FUNCTIONALITY**

Its innovative design, with a tilted control panel, makes it easier to control the product.



# **MAXIMUM ENERGY SAVINGS**

Its technology allows the product to offer maximum performance with minimum consumption.





# CONTROL AND TECHNOLOGY







Comfort, Eco and Touch panel with TFT display





OPTIMIZER Optimizer

Energy Plus



Optimum Flux



High sensitivity



Compatible with

# EFFICIENCY



Artificial Intelligence



Open Windows function



Early Start function



TRP consumption meter



GPS automation

### FUNCTIONALITY



Programmable from App



4 pre-installed



Product and App lock



Limited mode for guests



Boost function up to 2 hours





Holiday



Countdown

### DESIGN AND FINISHES



brackets











White RAL 9016



RAL 9005




mirror

**TECHNICAL SPECIFICATIONS** 

	White	OTI030SEB4	OTI050SEB4	OTI075SEB4
MODELS	Black	OTI030SEN4	OTI050SEN4	OTI075SEN4
	Chrome	OTI030SEC4	OTI050SEC4	OTI075SEC4
Naminal Dawar (M)	White / Black	300	500	750
Nominal Power (W) ——	Chrome	300	300	500
Number of bars		12	19	26
Width - L (mm)		500	500	500
Weight (Kg)		7.4	11.6	14.6
Recommended area (n	n²)	Up to 3 m <sup>2</sup>	Up to 5 m <sup>2</sup>	Up to 7.5 m <sup>2</sup>
Finishes		White F	AL 9016 / Matt black RAL 9005 /	Chrome
	White	8435556167310	8435556167327	8435556167334
EAN13	Black	8435556167372	8435556167389	8435556167396
_	Chrome	8435556167341	8435556167358	8435556167365

# SCHEME Dimensions in mm.

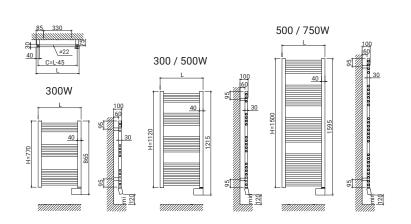








1) Compatible with 2.4 GHz Wi-Fi networks. 2) The figure may vary depending on the circumstances of the electrical installation.

The product includes 1.4 m cable without plug (right side outlet), brackets, installation kit + template and user manual.















# VENEZIA OVAL WIFT DIRECT

# ENERGY-EFFICIENT DIGITAL TOWEL RAIL WITH WIFI & AI

### **FEATURES**

# CONTROL AND TECHNOLOGY











Module WiFi Inside<sup>1</sup>



Comfort, Eco and Anti-frost mode

Bluetooth pairing

Compatible with voice assistants







High sensitivity

### **EFFICIENCY**

Optimizer

Energy Plus



Intelligence



function









sumption GPS automation

### FUNCTIONALITY







4 pre-installed programmes













Night saving mode





timer

# DESIGN AND FINISHES







side

100% steel body







# TECHNICAL SPECIFICATIONS

MODELS —	White	TVEWI50B077	TVEWI50B120
MODELS	Black	TVEWI50N077	TVEWI50N120
Nominal Power (W)		300	500
Number of bars		11	16
Width - L (mm)		500	500
Weight (Kg)		10.0 15.5	
Recommended area	(m²)	Up to 3 m <sup>2</sup>	Up to 5 m <sup>2</sup>
Finishes	White RAL 9016 / Textured black RAL 9005		
EAN10	White	8435556146926	8435556146933
EAN13	Black	8435556146964	8435556146971













# ENERGY-EFFICIENT DIGITAL TOWEL RAIL WITH WIFI & AI

### **FEATURES**

# CONTROL AND TECHNOLOGY









Touch panel without display



Comfort, Eco and Anti-frost mode



Bluetooth pairing



PRODUCT WITH REVERSIBLE PANEL

PANEL
Product available
to order with
control panel
on the left-hand
manifold.









High sensitivity



Compatible with

### EFFICIENCY



Artificial Intelligence



Open Windows function



Early Start function



TRP consumption meter<sup>2</sup>



GPS automation

### **FUNCTIONALITY**



Programmable from App



4 pre-installed programmes



Product and App lock



Limited mode for guests



Boost function up to 2 hours



Night saving mode



mode





Countdown

# DESIGN AND FINISHES



brackets



100% steel body



White RAL 9016




Matt Black RAL 9005



# Chrome mirror

# Displayed model TELWI50B112 - Elba Oval WiFi 500W white



# **TECHNICAL SPECIFICATIONS**


	White	TELWI50B077	TELWI50B112	TELWI50B150	
MODELS	Black	TELWI50N077	TELWI50N112	TELWI50N150	
	Chrome	TELWI50C077	TELWI50C112	TELWI50C150	
Nominal Power (W)	White / Black	300	500	750	
Norminal Power (W)	Chrome	300	300	500	
Number of bars		12	19	26	
Width - L (mm)		500	500	500	
Weight (Kg)		7.4	11.6	14.6	
Recommended area (n	n²)	Up to 3 m <sup>2</sup>	Up to 5 m <sup>2</sup>	Up to 7.5 m <sup>2</sup>	
Finishes	hes White RAL 9016 / Matt black RAL 9005 / Chrome				
	White	8435556146742	8435556146759	8435556146766	
EAN13	Black	8435556146827	8435556146834	8435556159186	
	Chrome	8435556146780	8435556146797	8435556146803	



# **ELBA** PLUS

DIGITAL ELECTRIC TOWEL RAIL PROGRAMMABLE

Displayed model TELL2I40B77 - Elba Plus 300W white

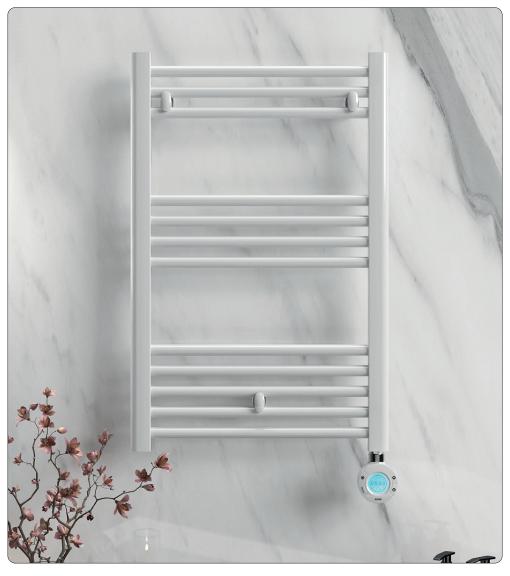



# PLUG & PLAY INSTALLATION Simple connection that allows you

Simple connection that allows you to enjoy cosy and comfortable warmth almost immediately.



# **ELEGANCE AND FUNCTIONALITY**


Its innovative design, with a circular, touch-sensitive control panel, makes it easier to control the product.



# **MAXIMUM ENERGY SAVINGS**

Its technology allows the product to offer maximum performance with minimum consumption.



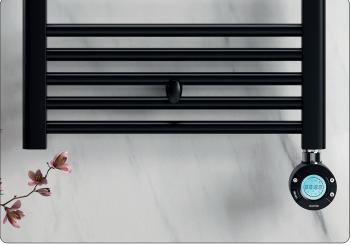

# CONTROL AND TECHNOLOGY









Touch panel with LCD display

Comfort, Eco and Anti-frost mode

Optimum Flux High sensitivity

EFFICIENCY



Open Windows function

### FUNCTIONALITY





Programmable

Panel lock

DESIGN AND FINISHES




steel body


100%












WITH REVERSIBLE PANEL Available to order with control panel on the left-hand manifold.

# **TECHNICAL SPECIFICATIONS**

	White	TELL2I40B77	TELL2I40B112	TELL2I50B77	TELL2I50B112
_	wille	TELLZ140B//	TELL2140B112	TELL2130B77	TELLZISUBTIZ
MODELS	Black	TELL2140N77	TELL2I40N112	TELL2I50N77	TELL2I50N112
	Chrome	TELL2I40C77	TELL2I40C112	TELL2I50C77	TELL2I50C112
Nominal Power (W)	White / Black	300	500	300	500
	Chrome	300	300	300	300
Number of bars		12	19	12	19
Width - L (mm)		400	400	500	500
Weight (Kg)		6.1	9.8	10.6	15.9
Recommended area (m	1 <sup>2</sup> )	Up to 3 m <sup>2</sup>	Up to 5 m <sup>2</sup>	Up to 3 m <sup>2</sup>	Up to 5 m <sup>2</sup>
Finishes			att black RAL 9005 / ome	/ White RAL 9016 / Matt black RAL 9005 / Chrome	
	White	8435556164722	8435556164739	8435556164166	8435556164173
EAN13	Black	8435556164760	8435556164777	8435556164203	8435556164210
	Chrome	8435556164746	8435556164753	8435556164180	8435556164197

# SCHEME Dimensions in mm.





GUARANTEE



ecodesign Rohs ( €



The product includes 1.4 m cable without plug (right side outlet), brackets, installation kit + template and user manual.







# **ELBA** swt

DIGITAL ELECTRIC TOWEL RAIL WITH ON / OFF CONTROL

# **FEATURES**



# DESIGN AND FINISHES







# TECHNICAL SPECIFICATIONS

MODELS	White	TEL20I40B077	TEL20I40B112	TEL20I50B077	TEL20I50B112
	Black	TEL20140N077	TEL20I40N112	TEL20I50N077	TEL20I50N112
Nominal Power (W)		300	500	300	500
Number of bars		12	19	12	19
Width - L (mm)		400	400	500	500
Weight (Kg)		6.1	9.8	10.6	15.9
Recommended area (m²)		Up to 3 m <sup>2</sup>	Up to 5 m <sup>2</sup>	Up to 3 m <sup>2</sup>	Up to 5 m <sup>2</sup>
Finishes		White RAL 9016 / Matt black RAL 9005 White RAL 9016 / Matt black RAL 9		latt black RAL 9005	
EAN13	White	8435556167624	8435556167631	8435556167587	8435556167594
	Black	8435556167648	8435556167655	8435556167600	8435556167617








### ELBA CABLE

### DIGITAL ELECTRIC TOWEL RAIL WITH HEATING ELEMENT AND CABLE

#### **FEATURES**



Heating element with cable Optimum Flux Tech

#### DESIGN AND FINISHES

STEEL 100%

steel body





**RAL 9005** 





#### DID YOU KNOW...

The Elba Cable towel rail is ideally suited for installation in **pilot wire** systems or home automation systems (such as KNX®).

It is also the perfect solution for connecting to sockets with a cut-off switch, or to thermostats to control their shutdown and start-up.

Contact us for more information.



	White	TELCI50B077	TELCI50B112
MODELS	Black	TELCI50N077	TELCI50N112
_	Chrome	TELCI50C077	TELCI50C112
Name in all Dances (IAI)	White / Black	300	500
Nominal Power (W) —	Chrome	300	300
Number of bars		12	19
Width - L (mm)		500 x 770	500 x 1.120
Weight (Kg)		10.6	15.9
Recommended area (n	n²)	Up to 3 m <sup>2</sup>	Up to 5 m <sup>2</sup>
Finishes		White RAL 9016 / Matt I	black RAL 9005 / Chrome
	White	8435556118374	8435556118381
EAN13	Black	8435556149514	8435556149521
_	Chrome	8435556118398	8435556118404







### **SUBLIME**


DIGITAL ELECTRIC TOWEL RAIL WITH TOUCH PANEL


#### **FEATURES**



#### DESIGN AND FINISHES








#### HIDDEN CABLES INSTALLATION SYSTEM

Direct connection to the network without visible cables. (Invisible installation)



MODELS	Brushed brass	SSI50L81			
MODELS	Polished steel	SSI50A81			
Nominal Power (W)		54			
Number of bars 5		5			
Width - L (mm)		500			
Weight (Kg)		3.8			
Recommended area	(m²)	Up to 3 m <sup>2</sup>			
Finishes	Finishes Brushed brass / Polished steel				
EAN13	Brushed brass	8435556164036			
EANTS	Polished steel	8435556164029			



# **MILANO**

#### DIGITAL ELECTRIC TOWEL RAIL WITH BUILT-IN HEATER

#### **FEATURES**

#### CONTROL AND TECHNOLOGY





Anti-frost mode





High sensitivity thermostat

#### **EFFICIENCY**

Touch panel with LCD display



Open Windows

#### FUNCTIONALITY













#### DESIGN AND FINISHES









White RAL 9016

100% steel body


Built-in heater

#### DID YOU KNOW...

The exclusive low consumption technology of the Rointe MILANO towel rails, tested in a climatic chamber, makes it possible to reduce the average nominal power required to maintain the best comfort in your bathroom by up to 70%1.







MODEL		TMILN50B115	
Number of bars		18	
Naminal Dawar (M)	Towel rail	500	
Nominal Power (W) —	Heater	1000	
Width - L (mm)		500 x 1150	
Weight (Kg)		9.9	
Recommended area (m²)		Up to 10 m <sup>2</sup>	
Finishes		White RAL 9016	
EAN13		8435556147626	





### **TOWEL RAILS**

Complete your water heating system with a towel rail to enjoy the unique well-being of drying yourself with warm, dry towels. Choose from one of our exclusively designed towel rails and give your bathroom that touch of elegance and unique style you're looking for.

Elba towel rail	42
Giza towel rail	44
Venezia towel rail	46
Circe towel rail	47
Torino towel rail	47
Rointe towel rail accessories	48
Valves for the installation of hydraulic towel rails	49



### **ELBA** AQUA

WET SYSTEM TOWEL RAIL

Displayed model

TELAN50N112 - Elba black RAL 9005



#### **FEATURES**

#### DESIGN AND FINISHES





1/2" connections 100% steel body

95°



Maximum temperature 95°C

Maximum pressure 8 bar







White RAL 9016

Matt Black RAL 9005

Chrome **mirror** 



For twin-pipe installations, it is recommended to connect the flow and return at the bottom of the towel rail. For single pipe installations, it must be installed from the bottom with the sensor supplied with the single pipe valve.


TELAN\*\*\*172

30





#### SCHEME Dimensions in mm.

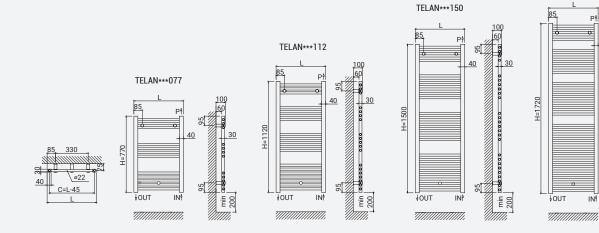


TECHNICAL SPECIFICA	(11011)				
MODELS -	White	TELAN40B077	TELAN40B112	TELAN40B150	TELAN40B172
	Chrome	TELAN40C077	TELAN40C112	TELAN40C150	TELAN40C172
Number of bars		12	19	26	34
Thermal power Δ T 50°C W		256	391	531	667
Water content (L)		2.65	4.01	5.43	6.65
Width (mm)		400	400	400	400
Weight (Kg)		3.6	5.5	7.8	9.6
Finishes			White RAL 90	016 / Chrome	
EAN13 ————	White	8435556127499	8435556127505	8435556127512	8435556127529
LANTO	Chrome	8435556127536	8435556127543	8435556127550	8435556127567
	White	TELAN45B077	TELAN45B112	TELAN45B150	TELAN45B172
MODELS -	Chrome	TELAN45C077	TELAN45C112	TELAN45C150	TELAN45C172
Number of bars		12	19	26	34
Thermal power Δ T 50°C W		276	422	574	720
Water content (L)		2.84	4.31	5.84	7.20
Width (mm)		450	450	450	450
Weight (Kg)		4.1	6.2	8.4	10.4
Finishes		7.1		0.4 016 / Chrome	10.4
i illistics	White	8435556130758	8435556130765	8435556130772	8435556130789
EAN13 ————	Chrome	8435556130796	8435556130802	8435556130819	8435556130826
	White	TELAN50B077	TELAN50B112	TELAN50B150	TELAN50B172
MODELS	Black	TELAN50N077	TELAN50N112	TELAN50N150	TELAN50N172
	Chrome	TELAN50C077	TELAN50C112	TELAN50C150	TELAN50C172
Number of bars	011101110	12	19	26	34
Thermal power Δ T 50°C W		299	459	624	782
Water content (L)		3.03	4.62	6.26	7.74
. ,					
Width (mm)		500	500	500	500
Weight (Kg)		4.4	6.7	9.1	11.2
Finishes			White RAL 9016 / Matt b	plack RAL 9005 / Chrome	
	White	8435556130833	8435556130840	8435556130857	8435556130864
EAN13	Black	8435556114253	8435556131328	8435556158820	8435556158837
	Chrome	8435556130871	8435556130888	8435556130895	8435556130901
MODELO	White	TELAN55B077	TELAN55B112	TELAN55B150	TELAN55B172
MODELS	Chrome	TELAN55C077	TELAN55C112	TELAN55C150	TELAN55C172
Number of bars		12	19	26	34
Thermal power Δ T 50°C W		322	495	674	847
Water content (L)		3.22	4.92	6.68	8.29
Width (mm)		550	550	550	550
Weight (Kg)		4.7	7.2	9.8	12.0
Finishes			White RAL 90	016 / Chrome	
	White	8435556130918	8435556130925	8435556130932	8435556130949
EAN13 ————	Chrome	8435556130956	8435556130963	8435556130970	8435556130987
	White	TELAN60B077	TELAN60B112	TELAN60B150	TELAN60B172
MODELS —	Chrome	TELAN60C077	TELAN60C112	TELAN60C150	TELAN60C172
Number of bars	2 0	12	19	26	34
Thermal power Δ T 50°C W		344	539	736	909
Water content (L)		3.42	5.23	7.09	8.83
Width (mm)		600	600	600	600
Weight (Kg)		5.0	7.7	10.5	12.8
Finishes		J.U		016 / Chrome	12.0
1 111101100	White	9/25556167700			0/2555616775/
EAN13 ————		8435556167723	8435556167730	8435556167747	8435556167754
	Chrome	8435556167761	8435556167778	8435556167785	8435556167792

# **GIZA**AQUA

WET SYSTEM TOWEL RAIL

Displayed model TGIAN50C120 - Giza Chrome

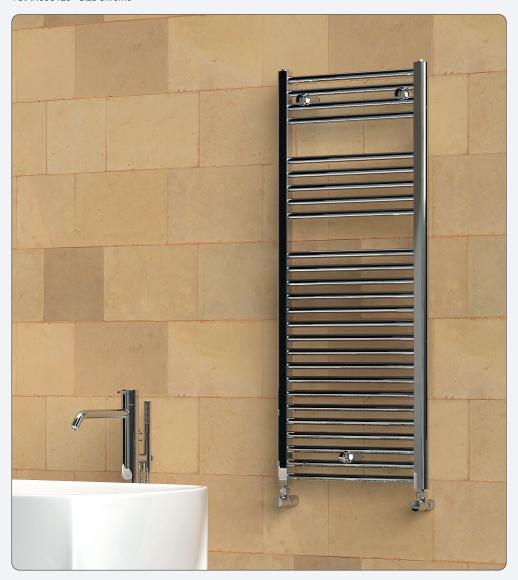

#### **FEATURES**

#### DESIGN AND FINISHES



STEEL

1/2" connections 100% steel body

95°

Maximum temperature 95°C

Maximum pressure 8 bar







White RAL 9016

RAL 9005

Chrome mirror





For twin-pipe installations, it is recommended to connect the flow and return at the bottom of the towel rail. For single pipe installations, it must be installed from the bottom with the sensor supplied with the single pipe valve.





C€

#### SCHEME Dimensions in mm.









MODELS -	White	TGIAN40B080	TGIAN40B120	TGIAN40B160	TGIAN40B180
	Chrome	TGIAN40C080	TGIAN40C120	TGIAN40C160	TGIAN40C180
Number of bars		16	26	32	38
Thermal power Δ T 50°C W		323	499	645	781
Water content (L)		3.11	4.87	6.23	7.21
Width (mm)		400	400	400	400
Weight (Kg)		4.7	7.4	10.0	11.8
Finishes			White RAL 90	016 / Chrome	
EANIAO	White	8435556131472	8435556131489	8435556131496	8435556131502
EAN13 ————	Chrome	8435556131632	8435556131649	8435556131656	8435556131663
MODELO	White	TGIAN45B080	TGIAN45B120	TGIAN45B160	TGIAN45B180
MODELS -	Chrome	TGIAN45C080	TGIAN45C120	TGIAN45C160	TGIAN45C180
Number of bars		16	26	32	38

MODELS	White	TGIAN45B080	TGIAN45B120	TGIAN45B160	TGIAN45B180
MODELS	Chrome	TGIAN45C080	TGIAN45C120	TGIAN45C160	TGIAN45C180
Number of bars		16	26	32	38
Thermal power ∆ T 50°C W		369	560	723	880
Water content (L)		3.37	5.29	6.74	7.82
Width (mm)		450	450	450	450
Weight (Kg)		5.4	8.4	10.8	12.8
Finishes		White RAL 9016 / Chrome			
EAN13 —	White	8435556131519	8435556131526	8435556131533	8435556131540
EANIS	Chrome	8435556131670	8435556131687	8435556131694	8435556131700

	White	TGIAN50B080	TGIAN50B120	TGIAN50B160	TGIAN50B180
MODELS	Black	TGIAN50N080	TGIAN50N120	TGIAN50N160	TGIAN50N180
	Chrome	TGIAN50C080	TGIAN50C120	TGIAN50C160	TGIAN50C180
Number of bars		16	26	32	38
Thermal power Δ T 50°C W		403	624	792	970
Water content (L)		3.63	5.71	7.25	8.43
Width (mm)		500	500	500	500
Weight (Kg)		6.2	9.7	12.2	14.2
Finishes			White RAL 9016 / Matt b	lack RAL 9005 / Chrome	
	White	8435556131557	8435556131564	8435556131571	8435556131588
EAN13	Black	8435556159070	8435556159087	8435556159094	8435556159100
	Chrome	8435556131717	8435556131724	8435556131731	8435556131748

MODELS	White	TGIAN55B080	TGIAN55B120	TGIAN55B160	TGIAN55B180
MODELS	Chrome	TGIAN55C080	TGIAN55C120	TGIAN55C160	TGIAN55C180
Number of bars		16	26	32	38
Thermal power ∆ T 50°C W		437	688	870	1060
Water content (L)		3.88	6.12	7.76	9.03
Width (mm)		550	550	550	550
Weight (Kg)		7.0	11.8	14.5	16.6
Finishes		White RAL 9016 / Chrome			
EAN12	White	8435556131595	8435556131601	8435556131618	8435556131625
EAN13 ————	Chrome	8435556131755	8435556131762	8435556131779	8435556131786

MODELS -	White	TGIAN60B080	TGIAN60B120	TGIAN60B160	TGIAN60B180
MODELS	Chrome	TGIAN60C080	TGIAN60C120	TGIAN60C160	TGIAN60C180
Number of bars		16	26	32	38
Thermal power ∆ T 50°C W		471	752	948	1150
Water content (L)		4.14	6.54	8.28	9.64
Width (mm)		600	600	600	600
Weight (Kg)		8.5	14.1	15.9	18.0
Finishes		White RAL 9016 / Chrome			
EAN12	White	8435556167808	8435556167815	8435556167822	8435556167839
EAN13	Chrome	8435556167846	8435556167853	8435556167860	8435556167877



## VENEZIA

WET SYSTEM TOWEL RAIL

Displayed model TVEAN50B077 - Venezia white RAL 9016



#### FEATURES

#### DESIGN AND FINISHES



1/2" 100% steel body



Maximum temperature 95°C



Maximum pressure 8 bar



White RAL 9016




For twin-pipe installations, it is recommended to connect the flow and return at the bottom of the towel rail. For single pipe installations, it must be installed from the bottom with the sensor supplied with the single pipe valve.

#### **TECHNICAL SPECIFICATIONS**

STEEL

MODELS -	White	TVEAN50B077	TVEAN50B120
MODELS	Black	TVEAN50N077	TVEAN50N120
Number of bars		11	16
Thermal power ∆ T 50°0	CW	306	457
Water content (L)		2.3	3.5
Axes distance (mm)		100	100
Weight (Kg)		5.5	8.2
Finishes		White RAL 9016 / Tex	ctured black RAL 9005
EANIA 2	White	8435556133193	8435556133209
EAN13 -	Black	8435556133230	8435556133247

#### SCHEME Dimensions in mm.










WET SYSTEM TOWEL RAIL

STAINLESS STEEL

Displayed model TCIAN53A080 - Circe brushed steel

MODELS	TCIAN53A080	TCIAN53A120
Number of bars	12	18
Thermal power ∆ T 50°C W	196	294
Water content (L)	1.7	2.6
Axes distance (mm)	500	500
Weight (Kg)	6.6	9.0
Finishes	Brushed sta	inless steel
EAN13	8435556134725	8435556134732



## **TORINO**AQUA





WET SYSTEM TOWEL RAIL



Displayed model TTOAN50A100 - Torino brushed steel

MODELS	TTOAN50A100
Number of bars	12
Thermal power Δ T 50°C W	377
Water content (L)	3.2
Axes distance (mm)	50
Weight (Kg)	8.6
Finishes	Brushed stainless steel
EAN13	8435556134626







### **ACCESSORIES**

### COMPATIBLE WITH ALL ROINTE TOWEL RAILS





This accessory allows you to extend the capacity of the towel rail by making it easier to place more towels and bath linen on it.

It is important not to exceed the maximum supported weight of 1KG per unit.


Available in 3 finishes: White, Chrome and Black.

Compatible with Orion, Milano, Elba and Giza towel rail ranges.

White	RSHW003					
Chrome	RSHC003					
Black	RSHB003					
ck	2 / minimum 20 packs					
ght (mm)	35 x 70					
with	Orion, Milano, Elba and Giza					
	White RAL 9010 / Chrome / Black					
White	8435556158967					
Chrome	8435556158981					
Black	8435556158974					
	Chrome Black ck ght (mm) with  White Chrome					



Displayed model RSHW003



Displayed model RSHC003



Displayed model RSHB003

#### **RACK**

This accessory allows more towels to be placed on the product, without exceeding the maximum supported weight.

The space between the wet towel and the towel rail facilitates faster drying.

Available in 3 finishes: White, Chrome and Black.

Compatible with the Orion, Milano, Elba and Giza towel rail ranges (450, 500, 550 & 600 mm wide models).

	White	RSRW003					
MODELS	Chrome	RSRC003					
	Black	RSRB003					
Units per pack		1 / minimum 20 packs					
Length x height (mm)		410 x 170					
Compatible	with	Orion, Milano, Elba and Giza					
Finishes		White RAL 9010 / Chrome / Black					
	White	8435556138549					
EAN13	Chrome	8435556138563					
	Black	8435556138556					



Displayed model RSRW003



Displayed model RSRC003



Displayed model RSRB003

#### **NEW PACKAGING**

Now, Rointe towel rail accessories have a new, more attractive and visual packaging, ideal for display on any commercial shelf.



### **VALVES**

### COMPATIBLE WITH ALL ROINTE WET SYSTEM TOWEL RAIL MODELS



#### TIFANA VALVE

Angle valve for the installation of copper and multilayer pipes.

	WHIT	E	VTITB0	2				
MODELS	CHROM	E	VTITC02					
MODEL2	BLAC	K	VTITNO	2				
	STAINLES	S	VTITS0	2				
Size (inche	s)		1/2"					
Connection	1		24 - 19	9				
	WHIT	E	843555613	9270				
EAN13	CHROM	E	8435556139287					
EANIS	BLAC	K	8435556139294					
	STAINLES	S	8435556139300					
		H						
G	F	Н	Α	L				
1/2"	24 x 19	64	23	55				

#### TIFANA LOCKSHIELD

Angle lockshield for copper and multilayer pipe.

		WHIT	F	VTITB01					
		CHROM		VTITC01					
М	ODELS	BLAC		VTITN01					
		STAINLES			VTITSO	-			
Si	ze (inche				1/2"	•			
Connection					24 - 19	9			
		WHIT	Έ	8	343555613	39232			
CHROME			IE	8435556139249					
E/	EAN13	BLAC	K	8435556139256					
		STAINLES	S	8435556139263					
	I	Co	H						
	G	F	Н		Α	L			
	1/2"	24 x 19	53		23	55			

#### HYDRA SIDE MONOTUBE VALVE

Single-pipe valve with thermostatic angle side connection and built-in lockshield.

(38 mm to shafts)

	WHITE	VTIHB01
MODELS	CHROME	VTIHC01
MODELS	BLACK	VTIHN01
	STAINLESS	VTIHS01
Size (inches	;)	1/2"
Connection		24-19
	WHITE	8435556139324
EAN13	CHROME	8435556139331
EAN 13	BLACK	8435556139348
	STAINLESS	8435556139355
H.		-G
G	F H	A L B C

38 35

#### COPPER PIPE ADAPTER

1/2" 24 x 19

Compatible with monotube valves.

54 | 65 | 141

VTIAC01         12         24-19         Chrome         8435556139423           VTIAC02         14         24-19         Chrome         8435556139430           VTIAC03         15         24-19         Chrome         8435556139447           VTIAC04         16         24-19         Chrome         8435556139454           VTIAC05         18         24-19         Chrome         8435556139461           VTIAC06         12         24-19         Stainless         8435556139478           VTIAC07         14         24-19         Stainless         8435556139485           VTIAC08         15         24-19         Stainless         8435556139492           VTIAC09         16         24-19         Stainless         8435556139508           VTIAC10         18         24-19         Stainless         8435556139515	MOD.	weasurement	Connection	FINISH	EAN 13
VTIAC03         15         24-19         Chrome         8435556139447           VTIAC04         16         24-19         Chrome         8435556139454           VTIAC05         18         24-19         Chrome         8435556139461           VTIAC06         12         24-19         Stainless         8435556139478           VTIAC07         14         24-19         Stainless         8435556139485           VTIAC08         15         24-19         Stainless         8435556139492           VTIAC09         16         24-19         Stainless         8435556139508	VTIAC01	12	24-19	Chrome	8435556139423
VTIAC04         16         24-19         Chrome         8435556139454           VTIAC05         18         24-19         Chrome         8435556139461           VTIAC06         12         24-19         Stainless         8435556139478           VTIAC07         14         24-19         Stainless         8435556139485           VTIAC08         15         24-19         Stainless         8435556139492           VTIAC09         16         24-19         Stainless         8435556139508	VTIAC02	14	24-19	Chrome	8435556139430
VTIAC05         18         24-19         Chrome         8435556139461           VTIAC06         12         24-19         Stainless         8435556139478           VTIAC07         14         24-19         Stainless         8435556139485           VTIAC08         15         24-19         Stainless         8435556139492           VTIAC09         16         24-19         Stainless         8435556139508	VTIAC03	15	24-19	Chrome	8435556139447
VTIAC06         12         24-19         Stainless         8435556139478           VTIAC07         14         24-19         Stainless         8435556139485           VTIAC08         15         24-19         Stainless         8435556139492           VTIAC09         16         24-19         Stainless         8435556139508	VTIAC04	16	24-19	Chrome	8435556139454
VTIAC07         14         24-19         Stainless         8435556139485           VTIAC08         15         24-19         Stainless         8435556139492           VTIAC09         16         24-19         Stainless         8435556139508	VTIAC05	18	24-19	Chrome	8435556139461
VTIAC08         15         24-19         Stainless         8435556139492           VTIAC09         16         24-19         Stainless         8435556139508	VTIAC06	12	24-19	Stainless	8435556139478
VTIAC09 16 24-19 Stainless 8435556139508	VTIAC07	14	24-19	Stainless	8435556139485
	VTIAC08	15	24-19	Stainless	8435556139492
VTIAC10         18         24-19         Stainless         8435556139515	VTIAC09	16	24-19	Stainless	8435556139508
	VTIAC10	18	24-19	Stainless	8435556139515

#### HYDRA SIDE MONOTUBE VALVE

Single-pipe valve with thermostatic angle side connection and built-in lockshield.

(38 mm to shafts)

	V	/HITE	VTIHB02						
MODEL	CHI	CHROME		VTIHC02					
MODELS	. B	LACK		VTI	HN02				
	STAIN	LESS		VTI	HS02				
Size (inc	Size (inches)			1	/2"				
Connecti	ion			24	1-19				
	٧	/HITE		843555	61393	62			
EAN13	CHF	ROME	8435556139379						
EAN 13	В	BLACK		8435556139386					
	STAIN	LESS	8435556139393						
H C C C C C C C C C C C C C C C C C C C									
		н		B		C			
G	F	H	A	B	A B	C			

#### MULTILAYER PIPE ADAPTER

Compatible with monotube valves.




MOD.	Measurement	Connection	Finish	EAN 13
VTIAM01	16x2	24-19	Chrome	8435556139522
VTIAM02	18x2	24-19	Chrome	8435556139539
VTIAM03	20x2	24-19	Chrome	8435556139546
VTIAM04	16x2	24-19	Stainless	8435556139553
VTIAM05	18x2	24-19	Stainless	8435556139560
VTIAM06	20x2	24-19	Stainless	8435556139577

### VALVE + LOCKSHIELD + ADAPTER KIT

Includes lockshield valve and copper adapter. Kit suitable for radiators and towel rails with angle joint and manual head.

MODELS	Measurement	Finish	EAN13
VTIKB01	1/2"	White	8435556139621
VTIKC01	1/2"	Chrome	8435556139638
VTIKN01	1/2"	Black	8435556139645

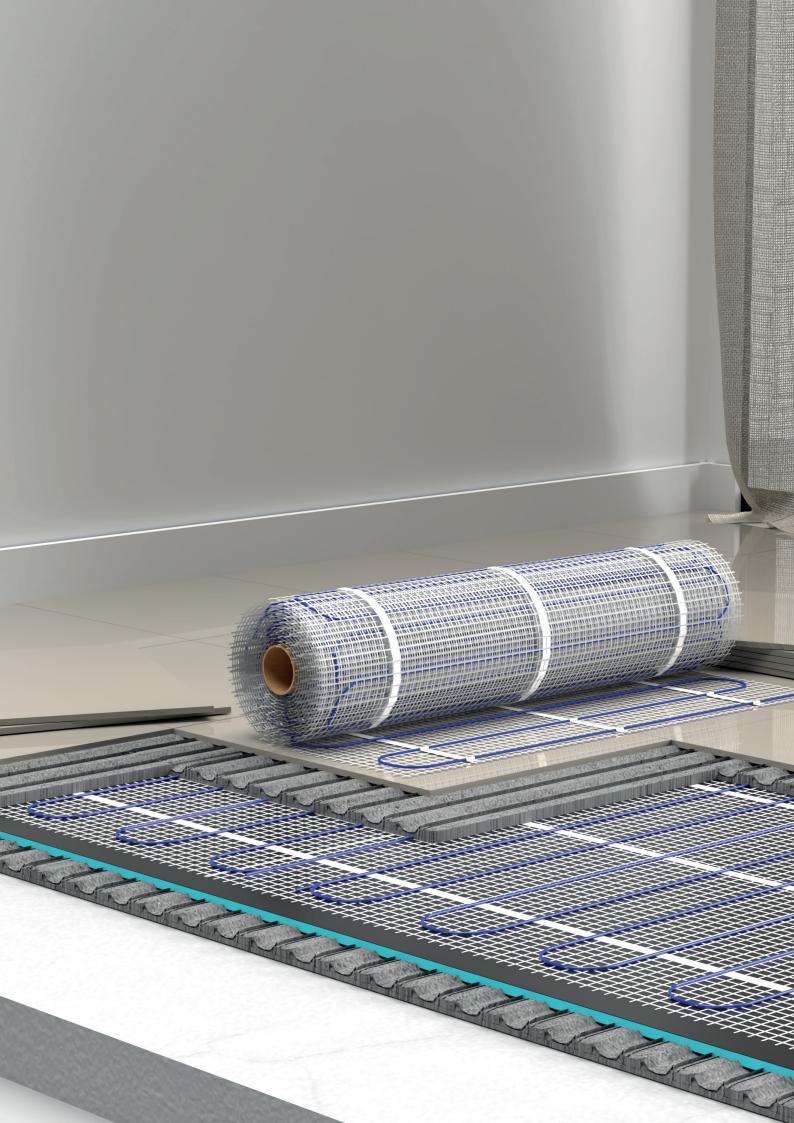




**ELECTRIC** 

### **UNDERFLOOR HEATING**

A warm home is a happy home. Discover the Rointe underfloor heating systems and be surprised with a warmth that envelops your entire home, providing a coziness in your footprint like you've never felt before. Install your underfloor heating system and enjoy the invisible comfort that rises from the ground.

Milos underfloor heating	52
Erko underfloor heating	53
Accessories for underfloor heating installation	54
Genius Thermostat @ DIRECT	56
Thermostat ST.2	57
Thermostat ST.3	57

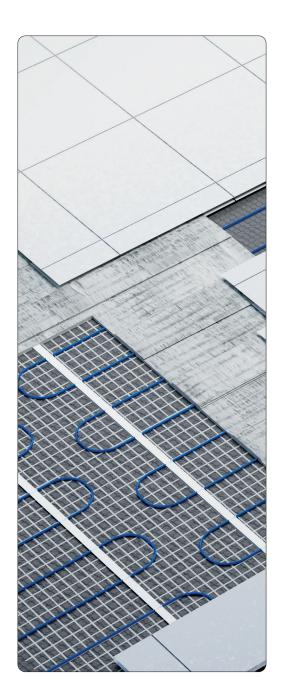



### MILOS W150



ELECTRIC HEATING MAT FOR HARD, CERAMIC AND PORCELAIN FLOORS

#### **FEATURES**

#### CONTROL AND FUNCTIONALITY



21°



Double insulated

Compatible with Rointe thermostats

Grounding

#### DESIGN AND FINISHES






80 mm cable spacing



3 m cold tail length



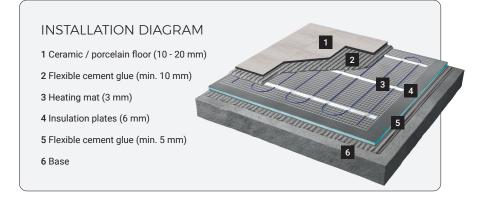

MODELS	MSIPVC010	MSIPVC015	MSIPVC020	MSIPVC025	MSIPVC030	MSIPVC035	MSIPVC040	MSIPVC045	MSIPVC050	MSIPVC060	MSIPVC070	MSIPVC080	MSIPVC090	MSIPVC100	MSIPVC120
Area (m²)	1	1.5	2	2.5	3	3.5	4	4.5	5	6	7	8	9	10	12
Power (W)	150	225	300	375	450	525	600	675	750	900	1050	1200	1350	1500	1800
Mat length (m)	2	3	4	5	6	7	8	9	10	12	14	16	18	20	24
Amperage (A)	0.7	1.0	1.3	1.6	2.0	2.3	2.6	2.9	3.3	3.9	4.6	5.2	5.9	6.5	7.8
Resistance Ω	353	265	176	141	118	101	88	78	71	59	50	44	39	35	32
IP protection								IPX7							
Cable length (m)							3 r	n (cold t	ail)						
Cable type							Phase,	Neutral,	Ground						
Accessories comp.			Insul	ation pa	nels (3.6	5 m²) - A	SCI56 or	ASCIX5	6 / Perin	neter ba	nd (2.5 n	n) - ASBI	PN01		
EAN 13	8436045918550	8436045918567	8436045918574	8436045918581	8436045918598	8436045918604	8436045918611	8436045918628	8436045918635	8436045918642	8436045918659	8436045918666	8436045918673	8436045918680	8436045918703

<sup>1)</sup> This product complies with the ECODESIGN standard when installed together with the ST.2, ST.3 or GENIUS thermostats.



### ERKO W140



### ELECTRIC HEATING MAT FOR LAMINATED, VINYL, LINOLEUM, AND CARPET FLOORS

#### **FEATURES**

#### CONTROL AND FUNCTIONALITY



21°



Double insulated

Compatible with Rointe thermostats

Grounding

#### DESIGN AND FINISHES







1.5 mm cable thickness



50 mm cable spacing



3 m cold tail length



#### **INSTALLATION DIAGRAM**

- 1 Coating
- 2 Upper protection:
- 2.1 Upper protection foil (1.5 mm) Installations with parquet or parquet flooring
- 2.2 Upper protection system (7 mm) Installations with carpet or vinyl less than 5 mm
- 3 Heating foil (1.5 mm)
- 4 Lower insulation blanket (1.2 mm)
- **5** Base

MODELS	MSIWFH010	MSIWFH015	MSIWFH020	MSIWFH030	MSIWFH040	MSIWFH050	MSIWFH060	MSIWFH070	MSIWFH080	MSIWFH090	MSIWFH100	MSIWFH120
Area (m²)	1	1.5	2	3	4	5	6	7	8	9	10	12
Power (W)	140	210	280	420	560	750	840	980	1120	1260	1400	1680
Mat length (m)	2	3	4	6	8	10	12	14	16	18	20	24
Amperage (A)	0.6	0.9	1.2	1.8	2.4	3.0	3.7	4.3	4.9	5.5	6.1	7.3
Resistance Ω	378	252	189	124	94	76	63	54	47	42	38	32
IP protection						IP	X7					
Cable length (m)						3 m (c	old tail)					
Cable type					Pl	hase, Neu	tral, Grour	nd				
Accessories comp.	Insulatio	n blanket	(10 or 25	m²) - ASL Cor	IU*** / Up nductive T					er Protecti	on Foil - A	SLSI01 /
EAN 13	8436045918727	8436045918734	8436045918741	8436045918758	8436045918765	8436045918772	8436045918789	8436045918796	8436045918802	8436045918819	8436045918826	8436045918833


### **ACCESSORIES**

### REQUIRED FOR THE INSTALLATION OF ROINTE ELECTRIC UNDERFLOOR HEATING

#### MILOS UNDERFLOOR HEATING

#### **INSULATION PANELS**

Insulation panels for Milos underfloor heating installation. Available with and without rigid cement coating.





WITHOUT CEMENT COATING WITH CEMENT COATING MODEL ASCI56 ASCIX56 Units per pack 5 units 5 units Area covered (unit) 0.72 m<sup>2</sup>/unit (total 3.6 m<sup>2</sup>) 0.72 m<sup>2</sup>/unit (total 3.6 m<sup>2</sup>) Length x width (mm) 1200 x 600 1200 x 600 Thickness (mm) 6 6 Compatible with Milos Milos EAN13 8435556159117 8435556159124

#### **PERIMETER TAPE**

Insulation system that is installed around the entire perimeter of the skirting board to absorb the expansion of the flooring and eliminate heat loss due to thermal bridges.

MODEL	ASBPN01
Units per pack	1 unit - 25 linear metres
Length (m)	25
Height (mm)	50
Compatible with	Milos
EAN13	8436045911001

- · Manufactured from extruded polyethylene
- · Reduces heat loss through the wall
- · Easy installation: pre-installed self-adhesive tape
- · Thermal insulation properties



#### **FIBRE GLASS TAPE**

Fixing system for the solid connection of Rointe insulating panels.

MODEL	ASCF01
Units per pack	1 unit - 45 linear m
Length (m)	45
Width (mm)	50
Compatible with	Insulation panels ASCI56 and ASCIX56
EAN13	8435556159025

- · For joining insulating panels
- Joins panels together and provides stability



#### **ERKO UNDERFLOOR HEATING**

#### **UPPER PROTECTION SYSTEM**

Protection system for installation over the ERKO radiant panel in installations with coverings less than 10 mm thick (carpet and vinyl flooring).

MODEL	ASLIDO		
Units per pack	4 units - 0.72 m²/unit		
Length x width (m)	1.2 x 0.6		
This law are (many)	Upper plate	4	
Thickness (mm)	Lower plate	3	
Compatible with	Erko		
EAN13	N13 8436045918864		

- · Improves floor stability
- · Protects the radiant sheet
- Excellent heat transfer (TOG 0.5)
- · Pre-installed extra-strong contact adhesive




#### TOP PROTECTIVE SHEETING

Protection system for installation under floors thicker than 10 mm (parquet and laminate floors).


MODEL	ASLSI01
Coverage (m²)	7.5
Length x width (m)	7.5 x 1.0
Thickness (mm)	1.2
Compatible with	Erko
EAN13	8435556137214

- · Thickness of only 1.2 mm
- Includes damp-proof layer
- · Cushions footfall and reduces impact sound
- Excellent heat transfer (TOG 0.14)
- · Easy installation: self-adhesive overlap



#### **INSULATION BLANKET LOWER**

- · Easy installation: self-adhesive overlap
- TOG 1.7 / Rm-value 0.17

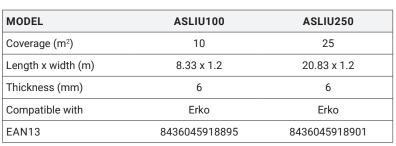


#### CONDUCTIVE TAPE



- · For the connection between Erko mats
- · Provides electrical continuity between mats

MODEL	ASCAI01		
Units per pack	1 unit - 20 linear metres		
Length (m)	20		
Width (mm)	50		
Compatible with	Erko		
EAN13	8435556137221		







45

#### DID YOU KNOW...

Dimensions in mm

The GENIUS digital thermostat can also function as a master thermostat, controlling all the Rointe connected heating products in your home, as if it were a central control unit.

Find out more on page 09.







### GENIUS WIFE DIRECT

#### DIGITAL TOUCH THERMOSTAT WI-FI WITH ARTIFICIAL INTELLIGENCE

#### **FEATURES**

#### CONTROL AND TECHNOLOGY



WiFi Inside<sup>1</sup>











Comfort, Eco and Bluetooth Anti-frost mode pairing

Compatible with voice assistants

3680W 16A

Max. permissible

6, 8, 10, 12, 15, 33 & 47 KΩ Compatible Integrated ambient temperature sensor

NTC ground sensor 10kOhm at 25°C included

#### **EFFICIENCY**



Intelligence



function









TRP consumption





#### **FUNCTIONALITY**



Programmable

product & App





Countdown







Limited mode for guests




mode

#### DESIGN AND FINISHES




Holiday

Heavy duty front panel

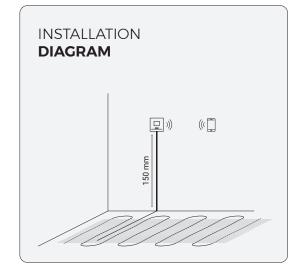

MODELS	TSGNI01
Maximum permissible power (W)	3680
Display size (inches)	1.77
Installed depth (mm)	19.5
Weight (g)	200
Finishes	Pearl White (rear) / Black RAL 9005 (front)
EAN13	8435556167884








#### Displayed model

TSEDI01 - Thermostat ST.3 white



Dimensions in mm.

### **ST.3**





### PROGRAMMABLE DIGITAL THERMOSTAT

#### **CONTROL AND TECHNOLOGY**

- Maximum permissible power: 3680W 16A.
- Compatible sensors ( $K\Omega$ ): 10.
- · Built-in ambient temperature sensor.
- NTC 10kOhm floor sensor at 25°C included (3 m length).

#### SAVINGS

- · Energy-efficient function Open windows.
- · Holiday and Maintenance modes.
- · Adaptive Start function.

#### **FUNCTIONALITY**

- 2 programming modes: Monday to Friday + Saturday + Sunday (5+1+1), every other day (7).
- · Panel locking from the product.

MODEL	TSEDI01
Max. permissible power (W)	3680
Screen size (mm)	63 x 49
Installed depth (mm)	16
Weight (g)	250
Finish	White
EAN13	8435556163480

### **ST.2**





### PROGRAMMABLE

# DIGITAL THERMOSTAT

- Maximum permissible power: 3680W 16A.
- Compatible sensors (KΩ): 10.
- · Built-in ambient temperature sensor.
- NTC 10kOhm floor sensor at 25°C included (3 m length).


#### SAVINGS

• Energy-efficient function Open windows.

#### **FUNCTIONALITY**

- 3 weekly programming modes (days): 5+2, 6+1, 7.
- · Locking from the product.

MODEL	TSETI03	TSETI02	
Max. permissible power (W)	3680	3680	
Screen size (mm)	45 x 50	45 x 50	
Installed depth (mm)	13	13	
Weight (g)	250	250	
Finish	White	Black	
EAN13	8436580778268	8436045911056	

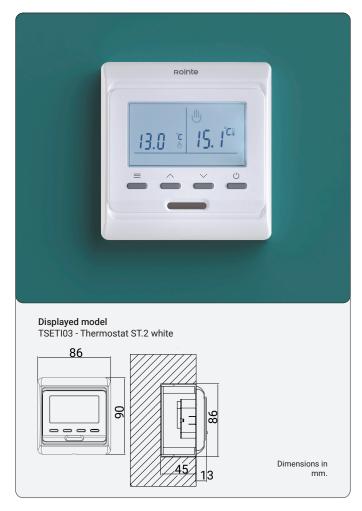



#### ELECTRIC DOMESTIC HOT

### **WATER HEATERS**

Enjoy the most efficient hot water with Rointe electric water heaters. Choose the most suitable product for your needs from a wide range that includes everything from undersink water heater to a water heater with Wi-Fi control. **With solutions up to 260 L, we have the perfect water heater for you.** 

Dalis Pro hot water heat pump	60
Rome unvented water heater @ DIRECT	62
Venice unvented compact water heater	63
Accessories for the installation of water heaters	64



### **DALIS** PRO

AIR SOURCE HEAT PUMP + STORAGE TANK ALL-IN-ONE FOR DOMESTIC HOT WATER

Displayed model

DWN260DHW5 - DALIS 260 L heat pump without heat exchanger







#### **TOUCH CONTROL PANEL**

The new DALIS Pro water heaters feature a large touch panel with LCD display for easy control.



#### **UPPER AIR SUPPLY**

The air inlet and outlet openings at the top ensure adequate heat exchange.



#### **AVAILABLE WITH HEAT EXCHANGER**

DALIS Pro is available in a model with a heat exchanger, which allows the product to be connected to solar collectors.

### SAVE ENERGY WITH DALIS PRO AND YOUR PHOTOVOLTAIC SYSTEM

DALIS Pro is 100% compatible with your renewable energy system.

With the installation of a PV controller, you can use the electrical energy from your solar panels to directly power your DALIS Pro heat pump. **Contact us to find out more**.



#### **FEATURES**

#### CONTROL AND TECHNOLOGY



Touch panel with display

EFFICIENCY



Comfort, Eco and Anti-frost mode





Refrigerant R134a







AUGMENTED **REALITY** 











Compatible with renewable energy sources

#### FUNCTIONALITY



Programmable

Function Anti-legionella **65**℃

Max. temp. with heat pump

DWI260DHW5

Max. temp. with heating element



Boost mode max. power

#### DESIGN AND FINISHES



Vitrified steel

**MODELS** 



CFC-free PU insulation




Magnesium protective anode

DWI200DHW5

#### **TECHNICAL SPECIFICATIONS**

- Models compatible with solarcollector systems DWI200DHWI5 DWI260DHWI5

Volume (L)	200	260	200	260
Heat pump power (W)	663	663	663	663
Heating element power (W)	1500	1500	1500	1500
Average consumption heat pump (kWh)	0.430	0.430	0.466	0.466
Required overload protection		16A T fuse / 16	A circuit breaker	
Internal protection	Safety thermostat with manual reset			
ОИТРИТ				
Load profile	L	L	L	L
Warm-up time	08:59 h:min	10:15 h:min	08:59 h:min	10:15 h:min
Heat pump output - Nominal Power (kW)	1.1	1.1	1.1	1.1
SCOP ACS <sup>2</sup>	2.8	2.8	3	3
SCOP ACS <sup>3</sup>	3.1	3.1	3.4	3.4
Amount of water mixed at 40°C	272	351	262	339
Annual electricity consumption AEC (kWh)	867	1355	867	1355
WORKING CONDITIONS				
Air inlet temp. min./max. (90% R.H.) (°C)	-10 / 43			
Min./max. temp. of installation site (°C)	4 / 43			
Coil connection to solar system (m²)	N/A	N/A	1	1.2
Cathodic protection	Magnesium anode Ø32x400 mm			
Insulation - PU rigid (mm)	50	50	50	50
Maximum working pressure (bar)	8	8	8	8
Transport weight (kg)	96	110	112	128
Compressor protection			with automatic r	
Type of protection of the thermodynamic circuit	Safety pressure switch with automatic reset [high / low pressure 2.5 / 0.1 Mpa].			
Rated air capacity (m³/h)	314			
Maximum available pressure (Pa)	98			
Motor protection	Internal thermal circuit breaker with automatic resetting			
Capacitor	Externally protected. No direct contact with water			
Antifreeze	4-way valve			
		4-way	valve	
Refrigerant charge (g)			valve 30	
Refrigerant charge (g) Global warming potential		88		




		With heat exchanger	Without heat exchanger			
CONNECTIONS						
CW	Cold water inlet	G 1"	G 1"			
HW	Hot water outlet	G 1"	G 1"			
IS	Coil flow	G 1"	-			
os	Coil return	G 1"	-			
TS	Temperature sensor	G 1/2"	-			
R	Recirculation	G 3/4"	G 3/4"			
EE	Opening resistance	G11/2"	G11/2"			
CD	Condensate drainage	G 3/4"	G 3/4"			
ThS	Safety thermostat	-	-			
MA	Magnesium anode	G11/4"	G11/4"			

	With heat exchanger		With heat exc	out
(mm)	200 L	260 L	200 L	260 L
h	1720	2010	1720	2010
а	994	1285	994	1285
b	724	834	724	834
d	995	1285	995	1285
f	803	1064	803	1064
j	681	781	-	-
k	60	60	60	60
n	681	766	681	766
u	1153	1440	1153	1440
w	58	58	58	58
М	260	260	260	260
Ø DF	160	160	160	160
R	1785	2055	1785	2055
Ø D	630	630	630	630

- Compared to a water heater of equivalent volume of Energy Classification C.
   Condition according to EN16147:2017 A7/W55.
   Condition according to EN16147:2017 A14/W55.







### ROME

#### WI FI DIRECT

#### DIGITAL ELECTRIC UNVENTED WATER HEATER WITH WIFI & ARTIFICIAL INTELLIGENCE

#### **FEATURES**

#### CONTROL AND TECHNOLOGY







Comfort, Eco and Anti-frost mode



Bluetooth pairing



Compatible with voice assistants

Module WiFi Inside<sup>1</sup>

INSU THERM

Thermal



Optimisation of water inflow

8<sub>bar</sub> Maximum operating pressure

#### EFFICIENCY

bridge break











GPS automation

#### **FUNCTIONALITY**



product & App











Anti-legionella









Product and App lock

Holiday mode

#### DESIGN AND FINISHES



Vitrified steel



CFC-free PU insulation



Magnesium protective anode



### Ceramic heating element



MODELS	RWI080DHWC4	RWI150DHWC4
Volume (L)	80	150
Load profile	М	XL
Nominal Power (W)	2400	2400
Distance between sockets (mm)	100	100
Empty weight (Kg)	24.1	36.6
Water inlet (inches)	1/2"	1/2"
Sizing (No. of persons)	Up to 3	Up to 4
Finish	White RAL 9016	
EAN13	8436045913074	84360459113531



### VENICE

#### ELECTRIC UNVENTED WATER HEATER **COMPACT UNDER/OVER SINK**

#### **FEATURES**

#### CONTROL AND TECHNOLOGY













Maximum operating pressure

#### DESIGN AND FINISHES









Magnesium protective anode



Safety thermostat



Submerged copper heating element



# Compact size

# Model shown VWI010DHWU4 - VENICE Water Heater 10 L Dimensions in mm. 324

Γ	Bottom outlet (over sink) model		Top outlet (und	der sink) model ———
MODELS	VWI010DHWD4	VWI015DHWD4	VWI010DHWU4	VWI015DHWU4
Volume (L)	10	15	10	15
Load profile	XXS	XXS	XXS	XXS
Nominal Power (W)	1500	1500	1500	1500
Dist. between sockets (mm)	100	100	100	100
Empty weight (Kg)	7.6	9.4	7.6	9.4
Water inlet (inches)	1/2"	1/2"	1/2"	1/2"
Sizing (persons)	1 (sink only)	1 (sink only)	1 (sink only)	1 (sink only)
Finish	White RAL 9016			
EAN13	8436045913159	8436045913166	8436045913616	8436045913623

### **ACCESSORIES**


### REQUIRED FOR THE INSTALLATION OF ROINTE ELECTRIC WATER HEATERS

#### **INSTALLATION KIT: VENICE**

It's mandatory for Venice unvented domestic hot water heaters to be installed with an installation kit if they are located more than 3 meters away from the sink or if the pressure is greater than 4 bar. This kit is compatible with Venice 10/15 L water heaters.


#### Installation scheme A

When inlet pressure is less than bar and expanded hot water can be put in pipework.




#### Installation scheme C

When inlet pressure is greater than 4 bar.



#### Installation scheme B

When inlet pressure is less than 4 bar but expanded hot water cannot be put in pipework.



#### **INSTALLATION DETAILS**

- 1 Expansion relief valve (included)
- 2 Nearest cold water draw off (not supplied)
- 3 Service valve (not supplied)
- 4 Expansion vessel (included)
- 5 Check valve (included)
- 6 Pressure reducing valve (included)


MINIMUM PIPE LENGTH				
Capacity 15 mm pipe 22 mm pipe				
10 L	2.7 mm	1.2 mm		
15 L	4.2 mm	1.8 mm		

MODEL	KITKW04	
Expansion Relief Value	15 - 25 mm	
Check Valve	0.35 Mpa	
Expansion Vessel	8 L (0.1 Mpa)	
Pressure Reducing Valve	0.60 Mpa	
EAN13	8436045912992	



#### **INSTALLATION KIT: DALIS**

It's mandatory for Dalis PRO air source heat pump hot water heaters to be installed with an installation kit.




#### **INSTALLATION DETAILS**

- 1 Mains cold water supply
- 2 Stop cock (not supplied)
- 3 Pressure reducing valve (included)
- 4+5 Check valve/Expansion relief valve (included)
- 6 Discharge pipe 22 mm
- 7 Drain cock (not supplied)
- 8 Tundish (included)
- 9 Expansion vessel (included)
- 10 T/P relief valve (included)
- 11 Electrolytic fittings (included)

MODEL	KITKW03
Pressure Reducing & Relief Valve	0.35 / 0.60 Mpa
Tundish	15 - 25 mm
Expansion Vessel	18 L (0.1 Mpa)
EAN13	8436045914354

#### **INSTALLATION KIT: ROME**

It's mandatory for Rome unvented domestic hot water heaters to be installed with an installation kit.





#### **INSTALLATION DETAILS**

- 1 Mains cold water supply
- 2 Stop cock (not supplied)
- 3 Pressure reducing valve (included)
- 4+5 Check valve/Expansion relief valve (included)
- 6 Discharge pipe 22 mm
- 7 Drain cock (not supplied)
- 8 Tundish (included)
- 9 Expansion vessel (included)
- 10 T/P relief valve (included)
- 11 Electrolytic fittings (included)

MODEL	KITKW02
Pressure Reducing & Relief Valve	0.35 / 0.60 Mpa
Tundish	15 - 25 mm
Expansion Vessel	12 L (0.1 Mpa)
EAN13	8436045914347

#### **ACCESSORIES** for Rointe water heaters

#### **SUPPORT TRIPOD**

MODEL	TPKW001
Length x height (mm)	715 x 420
Max. supported weight (kg)	260
Compatibility (L)	80 & 150
EAN13	8436045914323

#### **UNIVERSAL SUPPORT**

MODEL	KWSPTN01
Length x height (mm)	80 x 470
Max. supported weight (kg)	260
Compatibility (L)	80 & 150
EAN13	8436045910608



The use of the tripod does not exempt it from being fixed on the wall.









OTHER ELECTRIC

### **HEATING PRODUCTS**

Rointe is expanding its electric heating offer with solutions such as the Onyx Wi-Fi Direct technology storage heater, perfect for heating rooms quickly, efficiently and without complications. **Discover more products that combine technology and design for your comfort.** 

Onyx HHR Storage Heater (MIDDIRECT)	68
Giro portable heater / convector	70
Giro Short portable heater / Convector	71



# ONYX WIFI DIRECT

### SLIM DYNAMIC HIGH HEAT RETENTION HEATER WITH WIFI & AI

**Displayed model** SHOXI222 - Onyx storage heater 2,220 W











#### **DIRECT CONTROL WITHOUT GATEWAYS**

Integrated Wi-Fi module that allows direct connection to the router without the need for intermediate gateways.



#### **HIGH HEAT RETENTION (HHR)**

The quality of its materials means that more than 60% of the stored heat is retained even after 16 hours.



#### **MAXIMUM ENERGY SAVINGS**

The Onyx high heat retention storage heater saves up to 37% more energy than a standard storage heater.<sup>2</sup>



#### **INVERTER OPERATION**

Thanks to the **INVERTER SMART ADAPTIVE TECH** technology, the Onyx storage heater automatically adjusts the fan speed, intelligently and continuously adapting to the heating needs of each room.

This regulation improves the management of energy consumption and ensures constant thermal comfort.



#### **FEATURES**

#### CONTROL AND TECHNOLOGY



Module WiFi Inside



Touch panel with display Comfort, Eco and Anti-frost mode



Bluetooth pairing



Inverter Smart Mg-Fe allov Adaptive Tech



Single & Dual feed system



Compatible with voice assistants







Automatic charge control



Energy saving



Artificial Intelligence



Open Windows function



Early Start function



TRP consumption meter3



GPS automation







#### FUNCTIONALITY









4 pre-installed programmes



Product and App lock



Limited mode for guests



Boost mode max. power



Night saving



Holiday



Countdown

#### DESIGN AND FINISHES





100% metal body



PRODUCT **VIDEO** 



AUGMENTED **REALITY** 




DOWNLOAD APP **ROINTE NEXA** 




### **TECHNICAL SPECIFICATIONS**

MODELS	SHOXI102	SHOXI156	SHOXI222	SHOXI276	SHOXI330
Rated input +5%/-10% (W)	1020	1560	2220	2760	3300
Rated output (W)	500	700	1000	1250	1500
Classification (W)	340	520	740	920	1100
Max. storage capacity (Wh)	7140	10920	15540	19320	23100
Empty weight (kg)	22.7	26.1	30.0	35.5	38.5
Weight with cells (kg)	67	91	115	142	165
Finish			White RAL 9016		
Required cell packs (units) <sup>4</sup>	4	6	8	10	12
EAN13	8435556163435	8435556163442	8435556163459	8435556163466	8435556163473

#### SCHEME Dimensions in mm.






Model	Height (H)	Width (L)	Depth (D)
SHOXI102	740 mm	580 mm	190 mm
SHOXI156	740 mm	703 mm	190 mm
SH0XI222	740 mm	865 mm	190 mm
SHOXI276	740 mm	1069 mm	190 mm
SHOXI330	740 mm	1069 mm	190 mm

#### FLOOR SUPPORTS INCLUDED

# Standard WALL **FLOOR**



Model	Width	Height	Depth
Standard	225 mm	123 mm	132 mm
Height	225 mm	203 mm	132 mm

<sup>1)</sup> Compatible with 2.4 GHz Wi-Fi networks. 2) Tests carried out in independent laboratories.

<sup>3)</sup> The figure may vary depending on the circumstances of the electrical installation.
4) Each pack includes 3 power cells.



**GIRO** 

PORTABLE DIGITAL HEATER / CONVECTOR

Displayed model PHGRI2000H - Giro digital convector heater





**HEALTHY ENVIRONMENT** 

Removable humidifier included that can be refilled with water.



NO INSTALLATION REQUIRED

Product with brackets that can be easily moved.



TOUCH CONTROL PANEL

Touch control panel with large LED control display.

#### **FEATURES**

#### CONTROLS

- · Touch panel with LED display.
- · Room temperature selector.
- ECO mode.


#### **TECHNOLOGY**


- · Mica Stone Tech: mica stone panel.
- · Adjustable digital thermostat.
- · Overheating protection.

#### **FUNCTIONALITY**

- 2 output powers: 1000 W and 2000 W.
- · Adjustable timer.
- · Refillable humidifier.

MODELS	PHGRI2000H
Nominal Power (W)	2000
2 output powers (W)	1000/ 2000
Height (mm)	450
Weight (Kg)	5.9
Recommended area (m²)	20 - 25
Rechargeable humidifier	Included (removable)
Finishes	White
EAN13	8435556160557





730



**GIRO** SHORT

PORTABLE DIGITAL HEATER / CONVECTOR

Displayed model PHGRI1500H - Giro Short digital convector heater





**HEALTHY ENVIRONMENT**Removable humidifier included that can be refilled with water.



NO INSTALLATION REQUIRED

Product with brackets that can be easily moved.



**TOUCH CONTROL PANEL**Touch control panel with large LED control display.

#### **FEATURES**

#### CONTROLS

- · Touch panel with LED display.
- · Room temperature selector.
- ECO mode.


#### **TECHNOLOGY**

- · Open coil heating element.
- · Adjustable digital thermostat.
- · Overheating protection.

#### **FUNCTIONALITY**

- · 2 output powers: 750 W and 1500 W.
- · Adjustable timer.
- · Refillable humidifier.

MODELS	PHGRI1500H
Nominal Power (W)	1500
2 output powers (W)	750/ 1500
Height (mm)	250
Weight (Kg)	4.7
Recommended area (m²)	14 - 20
Rechargeable humidifier	Included (removable)
Finishes	White
EAN13	8435556160595

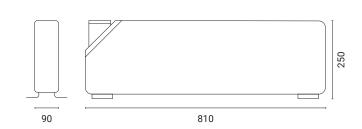





**INFRARED** 

# **OUTDOOR HEATING**

Discover Rointe's outdoor infrared heaters: the perfect combination of comfort, efficiency and elegant design.

Transform your outdoor life with Rointe.

Sahara infrared heater	74
Umbra Mini infrared heater	74
Lyra infrared heater	75
Lumia infrared heater	75
Fuji carbon fibre heater / lamp	76
Accessories for outdoor heaters	76
Amber vertical infrared heater	77

## **SAHARA**

# INFRARED HEATER FOR WALL OR CEILING

# 3 YEARS GUARANTEE IN THE PRODUCT



- Remote control included with 2 power output levels selector.
- · Instant comfort: Heat in just 3 seconds.



· More than 10000 hours of guaranteed service life.

#### **TECHNOLOGY**


- Infrared heating: heats objects or bodies directly by means of infrared radiation.
- · Heat source: gold halogen lamp.
- · Up to 95% thermal efficiency.

#### **FUNCTIONALITY**

- Recommended area: up to 5 m<sup>2</sup>.
- · Overheating protection system.
- · Safety system: anti-tilt shutdown.
- Silent operation.
- Soft light without disturbing glare.

#### **DESIGN**

- · Easy installation on wall or ceiling.
- Product compatible with tripod for unmounted operation (sold separately).
- · Suitable for indoor and outdoor installation.





MODEL	IRSHI2000B
Nominal Power (W)	2000
2 output powers (W)	1000/ 2000
Width x Height x Depth (mm)	675 x 105 x 72
Weight (Kg)	1.7
Recommended area (m²)	4 - 5
Finishes	Black
EAN 13	8435556160717

## **UMBRA** MINI

## SLIM INFRARED HEATER FOR INSTALLATION UNDER UMBRELLA

#### CONTROL

- · On/Off switch.
- Instant comfort: Heat in just 3 seconds.

#### **ENERGY**

· More than 10000 hours of guaranteed service life.

#### **TECHNOLOGY**

- Infrared heating: heats objects or bodies directly by means of infrared radiation.
- · Heat source: low glare amber lamp.
- Up to 95% thermal efficiency.

#### **FUNCTIONALITY**

- Recommended area: up to 5 m<sup>2</sup>.
- Overheating protection system.
- · Safety system: anti-tilt shutdown.
- · Silent operation.
- Soft light without disturbing glare.

#### **DESIGN**

- Easy installation on wall or ceiling.
- Product compatible with tripod for unmounted operation (sold separately).
- Suitable for indoor and outdoor installation.







MODEL	IRUBI2000B	
Nominal Power (W)	2000	
Width x Height (mm)	460 x 197	
Weight (Kg)	1.9	
Recommended area (m²)	4 - 5	
Finishes	Black	
EAN 13	8435556160779	

## **LYRA**



## INFRARED HEATER CEILING PENDANT

#### CONTROL

- Remote control included with on/off function.
- · Instant comfort: Heat in just 3 seconds.

#### **SAVINGS**

· More than 10000 hours of guaranteed service life.

#### **TECHNOLOGY**

- Infrared heating: heats objects or bodies directly by means of infrared radiation.
- · Heat source: low-glare halogen lamp.
- · Up to 95% thermal efficiency.

#### **FUNCTIONALITY**

- · Recommended area: up to 4 m2.
- · Overheating protection system.
- · Silent operation.
- Soft light without disturbing glare.

#### **DESIGN**

- · Easy installation under roof.
- · Suitable for outdoor and indoor installation.
- · Decorative and elegant design.





MODEL	IRLRI2000B
Nominal Power (W)	2000
Diameter (mm)	500
Height (mm)	216
Weight (Kg)	2.45
Recommended area (m²)	3 - 4
Finishes	Black
EAN13	8435556160786

## **LUMIA**

## INFRARED HEATER CEILING PENDANT

#### CONTROL

- · Pull-cord switch.
- · Instant comfort: Heat in just 3 seconds.

#### **SAVINGS**

• More than 10000 hours of guaranteed service life.

#### **TECHNOLOGY**

- Infrared heating: heats objects or bodies directly by means of infrared radiation.
- Heat source: low-glare halogen lamp.
- Up to 95% thermal efficiency.

#### **FUNCTIONALITY**

- Recommended area: up to 4 m<sup>2</sup>.
- · Overheating protection system.
- · Silent operation.
- · Soft light without disturbing glare.

#### **DESIGN**

- · Easy installation under roof.
- · Suitable for outdoor and indoor installation.
- Decorative and elegant design.
- Aluminium alloy housing.







MODEL	IRLMI1500
Nominal Power (W)	1500
Diameter (mm)	425
Height (mm)	230
Weight (Kg)	2.08
Recommended area (m²)	3 - 4
Finishes	Black
EAN13	8435556160564

## **FUJI**



## PORTABLE CARBON-FIBRE HEATING LAMP

#### CONTROL

- · On/Off switch.
- · Instant comfort: Heat in just 3 seconds.

#### **SAVINGS**

· More than 10000 hours of guaranteed service life.

#### **TECHNOLOGY**

- Infrared heating: heats objects or bodies directly by infrared radiation.
- · Carbon Fiber Tech: softer heat thanks to the
- · long-lasting carbon fibre filament.
- Up to 95% thermal efficiency.

#### **FUNCTIONALITY**

- · 360° heat range.
- · Recommended area: up to 4 m<sup>2</sup>.
- Overheating protection system.
- · Safety system: anti-tilt shutdown.
- · Silent operation.
- Soft light without disturbing glare.

#### **DESIGN**

- · Portable design with built-in handle.
- · Suitable for outdoor and indoor installation.





MODEL	IRFJI2000B
Base (mm)	200 x 200
Height (mm)	800
Weight (Kg)	3.80
Recommended area (m²)	3 - 4
Finishes	Black
EAN13	8435556160809

## **ACCESSORIES**

FOR ROINTE OUTDOOR HEATERS



#### **UNDER UMBRELLA SUPPORT**

MODEL	IRAPF01	
EAN13	8435556160878	



#### TRIPOD STAND

MODEL	IRATB01
Minimum height (mm)	1100
Maximum height (mm)	1800
Weight (Kg)	3.5
Finish	Black
EAN13	8435556160861



# **AMBER**

VERTICAL INFRARED HEATER





#### CONTROL

- Double mechanical switch.
- · Heat radius: 360°.

#### **TECHNOLOGY**


- · Halogen tube.
- · Aluminium reflector.

#### **FUNCTIONALITY**

- 3 output powers: 1200 / 1800 / 3000 W.
- Height adjustable.

MODELS	IRAMI3000
Nominal Power (W)	3,000
3 output powers (W)	1200 / 1800 / 3000
Width x Height (mm)	740 x 2050
Weight (Kg)	16
Recommended area (m²)	4 - 6
Finishes	Black
EAN13	8435556168096











## AND CLIMATE CONTROL

Our advanced cooling and air conditioning technology redefines comfort with innovative and sustainable solutions. With Rointe you can enjoy modern designs, maximum efficiency and commitment to the environment, guaranteeing wellbeing in every space.

Fiore Portable Air Conditioning	80
Drypure Dehumidifier	82

# FIORE 1750 / 2250 / 3000 FR


PORTABLE AIR CONDITIONING
1750, 2250 AND 3000 COOLING CAPACITY









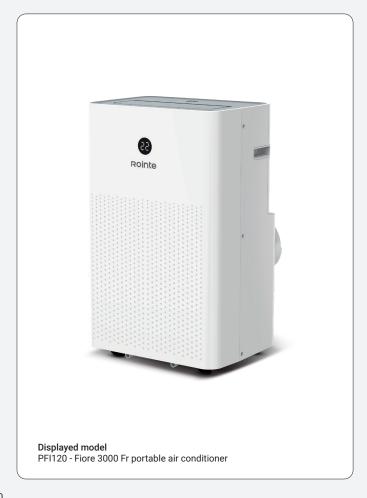

### **FEATURES**



#### EASY TO TRANSPORT

The product includes wheels for easy movement between rooms.

LED

#### LED TOUCH DISPLAY

Elegant high-brightness colour LED display on the top front of the product.



#### **EASY INSTALLATION**

Easy installation, maintenance and plug  $\&\,$  play operation.



#### DEHUMIDIFIER

Special function that balances the ambient humidity of the air without changing the room temperature.



#### AUTO RESTART

In case of power failure, the unit returns to the last mode selected by the user.



#### VINDOW KIT

The product includes a window kit for venting hot air to the outside.



#### IMER

Function that allows programming the on and/or off time of the unit.



#### EMOTE CONTROL

The units are fitted with a remote control for easy remote control.



#### FILTER INCLUDED

The unit is equipped with a filter designed to remove dust particles contained in the air.


#### **TECHNICAL SPECIFICATIONS**



MODELS			PFI070	PFI090	PFI120
Dehumidifica	ation capacity (30°C, 80%HR)	Litres	19.2	21.8	28.8
		Cooling	1750	2250	3000
Capacity / Po	ower	kW	2.05	2.6	3.5
		BTU	7000	9000	12000
EER		W/W	2.61	2.61	2.61
Energy class	ification		А	Α	А
Power supply	у		220-240 V, 50Hz	220-240 V, 50Hz	220-240 V, 50Hz
Amperes		A	3.5	3.9	5.8
Electricity co	nsumption	W	780	870	1330
Air flow rate		m³/h	290	340	390
Sound	Low speed	dB(A)	51	51	52
power	High speed	dB(A)	53	53	54
	Dimensions (A x B x C)	mm	315 x 310 x 700	315 x 310 x 700	432 x 350 x 700
Unit	Net weight	Kg	22	23	28
Length / diar	neter of the exhaust pipe	mm	1500/ 150	1500/ 150	1500/ 150
Recommend	ed area	m²	10 - 15	10 - 20	20 - 30
Selectable te	emperatures	°C	16 - 31	16 - 31	16 - 31
Refrigerant	Туре		R290	R290	R290
	Load	gr	115	150	200
Operating te	mperatures	°C	5 - 35	5 - 35	5 - 35
EAN13			8435556168287	8435556168294	8435556168300

#### **SCHEME**

Measurements located in the table above

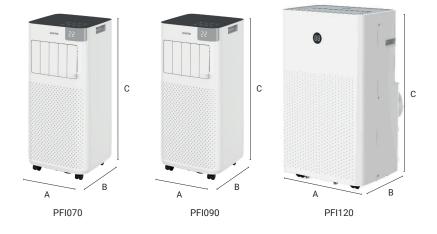

### DID YOU KNOW...

Rointe portable air conditioners include the new ultrasilent system, which **reduces the sound power of the device to 51 dB**, a noise level equivalent to a quiet street.



# DRYPURE 12/16 L

PORTABLE DEHUMIDIFIER WITH CONTINUOUS DRAINAGE OPTION 12 & 16 LITRES











### **FEATURES**



#### **EASY TO TRANSPORT**

The product includes wheels for easy movement between rooms.



#### 3 MODES

Three different modes of operation: Auto Mode, Dry Mode and Sleep Mode.



#### OVERHEATING PROTECTION

Automatic compressor overheat protection with three-minute delay.



#### LED DISPLAY WITH INDICATOR LIGHT

Front indicator with 3 light colours: red, green and blue depending on the level of ambient humidity detected.



#### 2 / 4.5 TANK (Depending on model)

The product incorporates a removable tank with a maximum capacity of up to  $4.5 \ \mathrm{litres}.$ 



#### TIMER FROM 1 TO 24 H

Function that allows programming the on and/or off time of the unit.



### CONTINUOUS DRAINAGE FUNCTION

The product can be operated with or without a tank, with continuous drainage mode.



#### HILD LOCK

Function that locks the control panel to prevent tampering with the product.



#### FILTER INCLUDED

The unit is equipped with a filter designed to remove dust particles contained in the air.






MODELS			DHDI12	DHDI16
Dehumidifica (30°C, 80%HF	tion capacity R)	L	12	16
Nominal Pow	ver	W	200	300
Power supply	1		220-240 V, 50Hz	220-240 V, 50Hz
Amperes		А	1.2	2.1
Air flow rate		m³/h	120	120
Sound level		dB	38	38
Unit	Dimensions (A x B x C)	mm	255 x 230 x 446	305 x 235 x 495
Offic	Net weight	Kg	10	13
Recommende	ed area	m²	8 - 15	15 - 20
Туре			R290	R290
Refrigerant	Load	gr	45	50
Water tank ca	apacity	L	2	4.5
Number of sp	peeds		2	2
Timer		Н	1 - 24	1 - 24
Filters			1	1
Ambient oper	rating temperature	°C	5-35	5-35
EAN13			8435556168348	8435556168355

## SCHEME

Measurements located in the table above





## Rointe

0203 321 5928 sales@rointe.co.uk www.rointe.co.uk

01 553 0523 sales@rointe.ie www.rointe.ie

This catalogue is marketing material and does not represent a commercial offer. For specific part numbers, please ask your wholesaler. It is possible that your product has other characteristics than those indicated in this catalogue, due to the continuous improvement of Rointe products.

The part numbers, EAN codes, descriptions & technical data are correct except for typographical errors.









Rointe Spain & Portugal P.I. Vicente Antolinos - C/ E, parcela 43 30140 Murcia T. 900 103 061

**Rointe United Kingdom** 

Unit A3, Hampton Business Park, Club Way, Hampton, Peterborough PE7 8JA T. 0203 321 5928

Rointe Ireland 20 Harcourt Street, Dublin 2, D02 PF99 T. 01 553 0523

Rointe France (Adresse fiscale) Tour CB21 16, Place d'Iris 92400 La Défense T. 01 73 05 70 01

Rointe Nederland 3197 LG Botlek T. 010 742 00 46